

# TIBCO ActiveMatrix BusinessWorks™

**Getting Started** 

Version 6.8.0 November 2021



# Contents

Contents	<b>2</b>
Changing Help Preferences	4
About the Getting Started Guide	6
Orientation	<b>7</b>
TIBCO Business Studio™ for BusinessWorks™	7
Application Development	8
Web Services	10
Shared Resources	10
Cheat Sheet	11
REST Support	13
REST Documenter and Tester	13
Discovering API Models from TIBCO Business Studio for BusinessWork	14
Importing an API Model into your Workspace	16
Creating an XML Schema for a Swagger File	18
Consuming a REST Endpoint in TIBCO Business Studio for BusinessWork	19
Synchronizing the Imported REST API Models in TIBCO Business Studio for BusinessWorks	21
Archive Files	21
Debugger	24
Run Time	25
Deployment	26
File Poller Tutorial	28
Creating a New Project	28
Configuring the FilePoller Project	29
Testing the FilePoller Application in the Debugger	32

By default, documentation access from TIBCO Business Studio<sup>™</sup> for BusinessWorks<sup>™</sup> is online, through the TIBCO Product Documentation website that contains the latest version of the documentation. Check the website frequently for updates. To access the product documentation offline, download the documentation to a local directory or an internal web server and then change the help preferences in TIBCO Business Studio for BusinessWorks.

#### **Before You Begin**

Before changing the help preferences to access documentation locally or from an internal web server, download the documentation.

- 1. Go to https://docs.tibco.com/
- 2. In the **Search** field, enter TIBCO ActiveMatrix BusinessWorks™ and press **Enter**.
- 3. Select the TIBCO ActiveMatrix BusinessWorks™ product from the list. This opens the product documentation page for the latest version.
- 4. Click Download All.
- 5. A compressed .zip file containing the latest documentation is downloaded to your web browser's default download location.
- 6. Copy the .zip file to a local directory or to an internal web server and unzip the file.

To point to a custom location:

#### **Procedure**

- 1. Perform one of the following steps in TIBCO Business Studio for BusinessWorks based on your operating system:
  - On Windows OS: Click Window > Preferences
  - On macOS: Click TIBCO Business Studio > Preferences.
- 2. In the Preferences dialog box, click **BusinessWorks > Help**.
- Click Custom Location, and then browse to the html directory in the folder where
  you extracted the documentation or provide the URL to the html directory on your
  internal web server.

5   Changing Help Preferences	
4. Click <b>Apply</b> , and then click <b>OK</b> .	
	TIDOO Askins Makain Dusin asa Wanta Til Cathing Chartad

# About the Getting Started Guide

This guide contains tutorials that are designed to familiarize you with a representational set of activities you might use to develop an application. By referring to these simple tutorials, you can understand how to use TIBCO ActiveMatrix BusinessWorks™TIBCO ActiveMatrix BusinessWorks Express within each phase of the project life cycle.

These tutorials illustrate the basic activities for creating an application, building and testing a simple REST service, and basic information on deploying the Administration sample applications using the provided scripts.

For more information, see one of the following topics:


- File Poller Module Tutorial: Guides you through creating a simple process and running it.
- REST Service Tutorial: Walks you through the steps to build and test a simple REST Service using TIBCO Business Studio<sup>™</sup> for BusinessWorks<sup>™</sup> and the Swagger UI.
- REST Reference Tutorial: Shows you how to create a simple REST Invoke to an
  existing REST Service defined by a Swagger specification.
- Administration Tutorial: Provides information about the administration framework and deploying sample applications using the provided scripts.

The Orientation section introduces you to the TIBCO Business Studio for BusinessWorks development environment. Before you continue, read the *TIBCO ActiveMatrix* BusinessWorks™ Concepts guide to familiarize yourself with the ActiveMatrix BusinessWorks™ concepts and terminology.

TIBCO ActiveMatrix BusinessWorks<sup>™</sup> is an integration product suite for enterprise, web, and mobile applications.

TIBCO Business Studio for BusinessWorks allows you to create services and integrate applications using a visual, model-driven development environment, and then deploy them in the ActiveMatrix BusinessWorks™ runtime environment.

TIBCO ActiveMatrix BusinessWorks<sup>™</sup> Express is an integration product suite for enterprise, web, and mobile applications. The software allows you to create services and integrate applications using a visual, model-driven development environment, and then deploy them in the ActiveMatrix BusinessWorks<sup>™</sup> Express runtime.

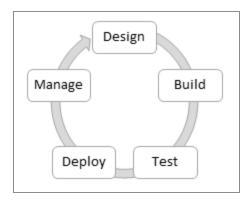

This product uses Eclipse-based graphical user interface (GUI) provided by TIBCO Business Studio for BusinessWorks to define business processes and generate deployable artifacts in the form of archive files. These deployable artifacts can be:

- deployed and run in the product runtime, and
- managed using the console or bwadmin, or the web-based Admin UI.

# TIBCO Business Studio™ for BusinessWorks™

TIBCO Business Studio for BusinessWorks is the design-time IDE (based on Eclipse) where you create and test your processes.

You use TIBCO Business Studio for BusinessWorks for end-to-end application development. You can create new services, orchestrate business process, and integrate applications in a short time. A model-driven development approach is supported, with a rich set of palettes

for process design. These palettes can be used to visually create and test business processes that connect to various technologies such as a database, messaging servers, and so on.

TIBCO Business Studio for BusinessWorks is installed as part of ActiveMatrix BusinessWorks

To open TIBCO Business Studio for BusinessWorks:

TIBCO Business Studio is installed as part of TIBCO ActiveMatrix BusinessWorks Express. To start TIBCO Business Studio:

- On Unix: Run the TIBCO Business Studio for BusinessWorks executable located in the \$TIBCO\_HOME/studio/<version>/eclipse/ directory.
- On Windows: Click Start > All Programs > TIBCO > TIBCO\_HOME > TIBCO Business
   Studio <version\_number> > Studio for Designers

On the **Workspace Launcher** dialog, accept the default workspace or browse to create a new workspace, and click **OK**.

When TIBCO Business Studio for BusinessWorks starts, the default development environment, a *workbench*, is displayed.

For more information about samples in TIBCO Business Studio for BusinessWorks, see the section Accessing Samples in the *TIBCO ActiveMatrix BusinessWorks™TIBCO ActiveMatrix BusinessWorks™ Samples* guide.

# **Application Development**

Applications solve integration problems of varying complexity. Using TIBCO Business Studio for BusinessWorks, applications can be developed using an application-oriented integration style or a service-oriented integration style. How you design your application's integration style depends on the following factors:

- Speed of integration
- Data abstraction
- Richness of operation primitives
- Typical endpoints


For more information about an application's integration style and other application design considerations, see "Application Design Considerations" in the *ActiveMatrix BusinessWorks Application Development* guide.

Processes allow you to implement business logic that can obtain and manage the flow of information in an enterprise between a source and different destinations. In process-driven design, the business processes or integration flows are first realized and captured. For more information about process design, see "Process Design Considerations" in the *ActiveMatrix BusinessWorks Application Development* guide.

Processes developed in TIBCO Business Studio for BusinessWorks are saved in an application module. Application modules are equivalent to projects and are saved to folders on the disk. The TIBCO Business Studio for BusinessWorks workspace contains one or more application modules.

- An application module contains one or more packages
- A package contains one or more processes, which in turn are main processes or subprocesses
- A process is stored as a single file with a .bwp extension

An application module contains a special folder called **Processes**. This folder contains the user created processes. In addition, an application module also contains folders to store WSDL files, schemas, and shared resources. The **Processes** folder is shown below.

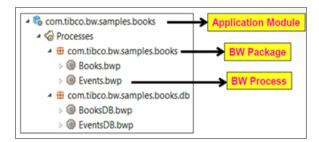

0

**Note:** Note: A package should follow the Java naming convention.

Processes are designed in the **Process Editor**. Activities and shared resources help you rapidly design business processes. An activity is the individual unit of work in a process. There are multiple ways to add an activity to a process: from the right-click menu on the **Process Editor**, from the palettes, and from the **File Explorer** or **Project Explorer**. To add an activity from the palette, select it and drop it on the **Process Editor**.

Implemented services are shown as chevrons on the left side of the **Process Editor**. References that are invoked are shown on the right side of the **Process Editor**. For a simple process, services and references are optional.

### Web Services

Web services are application components that communicate using open standard protocols. You can develop SOAP-based web services using the Generate Concrete WSDL Wizard. The wizard generates a WSDL file and the appropriate response activities. You can develop REST-based web services using the REST Service Wizard in TIBCO BusinessWorks™ Container EditionActiveMatrix BusinessWorks.


Select a WSDL file in the **Project Explorer** and drop it on the **Process Editor** to implement a web service. Dropping the WSDL file displays a menu for creating services or implementing operations. Response activities are automatically generated.

To create a REST service, select a path under the .json file in the **Service Descriptors** folder and drop it on the **Process Editor** to implement a web service. When you drop the path, it displays a menu with an option to create a service or a reference.

### **Shared Resources**

Shared resources are configurations that are shared among activities. These are resources such as database, JMS and HTTP connections, and connections to other servers. Resources are added to special folders in the **Project Explorer**. The following image shows these folder in the **Project Explorer**.

#### Shared Resources Folders in Project Explorer

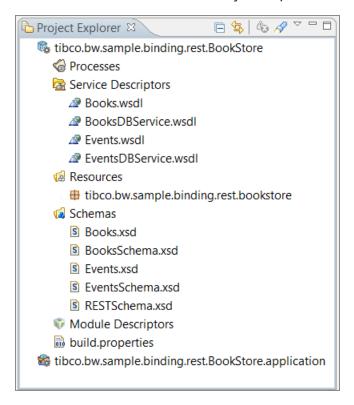

The following types of folders for shared resources can exist in a project.

- **Resources**: Contains shared resources used by activities in a process.
- Schemas: Stores XSD (schema) files.
- Service Descriptors: Stores WSDL and JSON files.

### **Cheat Sheet**

A quick reference help is available in the form of cheat sheets for few common tasks in TIBCO Business Studio for BusinessWorks.

Open a cheat sheet using any one of the following ways:

• On the Welcome page, click the Quick Start link. If you open TIBCO Business Studio for BusinessWorks in a new workspace, the Welcome screen is displayed. If you open ActiveMatrix BusinessWorks™ in an existing workspace, open the Welcome page by using **Help > Welcome**.



• Click Help > Cheat Sheets.

Cheat sheets are available for the following tasks:

- Adding unit testing to a project.
- Creating a basic SOAP application.
- Creating an application using Java Invoke.
- Configuring a JMS connection and creating a JMS send message application.
- Configuring a JBDC connection using custom driver.
- Developing a REST API to expose a SOAP service.
- Exposing a SOAP service via REST API.
- Using security policies in a project.


# **REST Support**

The TIBCO® Cloud Integration supports REST. You can create REST services as well as REST references by dragging and dropping a process from the **Project Explorer** to the **Process Editor**.

#### **REST Documenter and Tester**

A REST documenter and tester is automatically generated for a REST resource. The documentation is based on the Swagger specification and is rendered using the Swagger UI.

#### Swagger UI

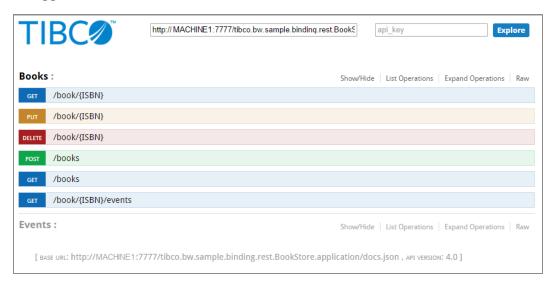

This Swagger based interface provides a convenient and quick way to:

- View REST endpoints and operations implemented by the REST resource service.
- Examine the inputs and outputs for each operation in JSON format.
- Enable Input fields to specify JSON or XML input for each operation.
- Invoke an operation and receive a live response for the input supplied.

# Discovering API Models from TIBCO Business Studio for BusinessWork

To view the APIs that reside on your local machine or on a remote server, use the **API Explorer** view in the TIBCO Business Studio for BusinessWorks.

#### **Before You Begin**

For the API Explorer to discover the APIs residing on a remote server, the remote server must be up and running.

You can set up the locations to which you want the API Explorer to connect and look for the APIs. To do so, follow the steps below.

#### **Procedure**

- 1. In TIBCO Business Studio for BusinessWorks, go to the API Explorer view.
- 2. In the **API Explorer** tab, click the **View Menu** downward-facing triangle icon (♥) and select **Settings**.

The Settings dialog box is displayed.

The registries for the ActiveMatrix BusinessWorksTIBCO ActiveMatrix BusinessWorks™ - API Modeler and the samples folder installed on your local machine are configured and appear in the API registry configurations box by default. In this dialog, you can specify how the discovered APIs appear in the API Explorer:

API Presentation - specifies how the APIs appear in the API Explorer

**Flat** - displays the APIs as a flat list with each API's version number displayed next to its name in parenthesis. If there are multiple versions of the same API, each version is shown as a separate API, hence multiple APIs with the same name but different version numbers.

**Hierarchical** - displays every API as a hierarchy of API name label with version number folder under it and the actual API under the version folder. If there are multiple versions for an API, each version is listed in its own separate folder under the API name label.

**Latest Version** - displays only the latest version of the API, even though there are multiple versions available.

• Group by API registry - groups the APIs according to the registry from which

they were discovered

 API registry configurations - displays the list of API registries that are currently configured in your TIBCO Business Studio for BusinessWorks installation.

Select the API registry check boxes to display the APIs.

You can edit an existing registry by clicking the **Edit** button, delete the registry configuration by clicking **Remove**, or changing the order in which the registries show up in the API Explorer by using the **Up** and **Down** button. These button get activated when you click on an API registry name.

- 3. Click **New** to add a new registry.
- 4. In the Create new API Registry client configuration dialog do the following:
  - a. Enter a name for the API registry that you are mapping to in the **Name** text box.
  - b. Select the Local radio button to map a location where the APIs are stored on your local machine's hard drive and navigate to the location using the Browse button. Alternatively, select the Remote radio button if you want to map to a remote server that contains the APIs and enter the URL for the server in the URL text box.
- 5. Click Finish.

You should now see the APIs displayed in the **API Explorer** in the format that you specified in the Settings dialog box. Expanding an API show you its version, the resource path, and the operations to perform on that resource.



**Note:** Note: Organizations can have multiple owners, and a list of owners is displayed in the Edit API Registry client configuration page.

The **API Explorer** view has the following quick-access buttons that you can use to format the way the APIs are listed:

- 🚱 Refresh
- 🖽 Expand All
- 🖻 Collapse All

- Group by API Registry
- Estation
- API Registries. Selecting a registry from this drop-down list toggles between displaying and hiding the registry in the API Explorer.

Use the search filter that appears at the bottom of the **API Explorer** view to search for API names that match the string that you enter in the **Filter** text box. You can search by typing in the version number, the full API name, or a full word within an API name. Wildcards are not supported. The search is case insensitive.


### Importing an API Model into your Workspace

The APIs that are discovered from local and remote servers are displayed in the **API Explorer** tab of the ActiveMatrix BusinessWorks. You can use these APIs in your project by importing them into the **Service Descriptors** folder of the project. The .json file for the API gets copied into the application module.

To import the APIs from the API Explorer into your project follow these steps.

#### Procedure

Right-click on one or more API names in the API Explorer and select Import.
 The Import API dialog opens.

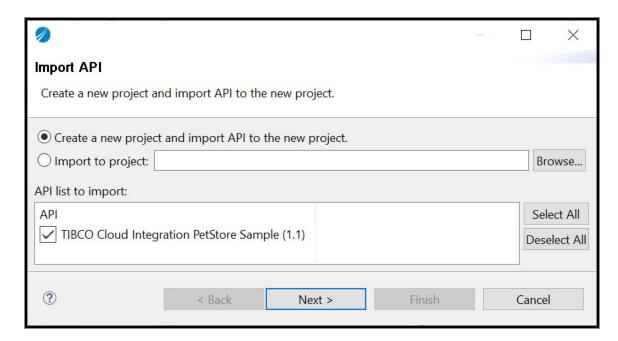


Every API you selected in the **API Explorer** is listed in this dialog. If an API has multiple versions, all versions are listed. By default, all APIs listed here are selected. You can deselect APIs that you do not want to import by clearing its check box.

2. Select the appropriate action and click **Next**.

Option	Description
Import to project	Select the radio button to import the API into an existing project and browse to the project using the <b>Browse</b> button.
Create a new project and import API to the new project	To create a new project and import the API into that project select the radio button.
API list to import	Select the API or the appropriate version of the API when there are multiple versions of the API available.

The Change Swagger name dialog box opens.

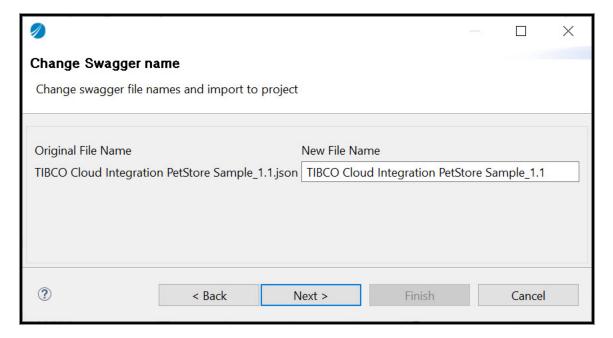

Change the swagger file name if required. Click Next.

The New BusinessWorks Application Module dialog box opens.

3. Create a new application module with appropriate details and click **Finish**.

You should see the API(s) under the **Service Descriptors** folder of the project. You can create sub-folders under the **Service Descriptors** folder and drag-and-drop APIs into them if you prefer to organize the APIs into a meaningful folder structure.

As an alternative to the above procedure, you can also drag and drop the API from the **API Explorer** into the project's **Service Descriptors** folder.



**Note:** Note: APIs that were created using a Swagger file must be implemented exactly as defined by the Swagger file. ActiveMatrix BusinessWorks allows you to only view the parameters and operations that are defined in the Swagger file. You cannot create any new parameters or operations for such applications.

### Creating an XML Schema for a Swagger File

TIBCO Business Studio for BusinessWorks supports the creation of an XML schema for an imported Swagger 2.0 or a Swagger 3.0 file.

You can create an XML schema for a Swagger 2.0 or a Swagger 3.0 files in one of two ways described below.

#### **Before You Begin**

A Swagger 2.0 or a Swagger 3.0 file must exist in the **Service Descriptors** folder of the project. Ensure to import the Swagger file into the **Service Descriptors** folder before you follow these steps:

#### **Procedure**

- 1. Drop the Swagger file on the right side of the canvas to create a REST service binding. This action generates an XML schema for the Swagger file under the **Schemas** folder. The XML schema file has the same name as the Swagger file. Or
- 2. Right-click the Swagger file in the **Service Descriptors** folder and select **Refactor >** Generate XSD Schema.
  - To see which XML schema is related to the Swagger file, right-click the Swagger file and select **Refactor > Open XSD Schema**.
  - If you have multiple Swagger files all of which contain a definition for the same object, the definition for the object in all the Swagger files must be identical.
  - If you have multiple Swagger files with one file (a master file) containing a super set of definitions contained in the other files, generate an XSD file from the master Swagger file that contains the super set, and create links to the other files in the master Swagger file. If you create a link to the super set file in one of the subset files and then create an XSD from the subset file, then the XSD contains only those elements that are common to both files. It does not contain elements for definitions that exist only in the super set file.

### Consuming a REST Endpoint in TIBCO Business Studio for BusinessWork

Create a REST Reference binding to consume a REST endpoint.



**Note:** Note: You cannot edit the REST reference binding configuration for APIs that are imported from a source external to TIBCO Business Studio for BusinessWorks.

#### **Before You Begin**

Swagger API documents must be imported into the project's **Service Descriptors** folder. This gives you the ability to expand and collapse endpoints, operations, parameters and response codes in the **Project Explorer**.

To consume a REST API that exists in the **Service Descriptors** of the project, do the following:

#### Procedure

- 1. Expand the Swagger file in the **Service Descriptors** special folder to view the endpoints, operations, parameters, and response codes.
- 2. Drag an endpoint on the right side of the canvas to create a REST reference binding. This creates a cloud shaped icon with a right facing arrow. The cloud is an indication that it is a REST reference whereas the arrow within the cloud indicates that it is a binding. Since the binding is within a cloud, it is an indication that it is a REST binding. You cannot convert a REST binding to a SOAP binding or vice versa.

**Note:** Note: When you create a REST reference for the service, make sure to edit the **Default Host** field in the HTTP Client Resource to reflect the actual host name. By default, the **Default Host** field is set to localhost.

- 3. Drag and drop an operation from the REST reference binding on to the canvas.
  - This creates an **Invoke** activity which is pre-configured to invoke the operation. It also creates an HTTP Client Shared Resource with the host name and port number. The configuration for these entities is copied from the Swagger document from which you created the reference binding. The reference consists of the name of the API as well as the operations it supports.
  - When invoking a POST or PUT method, you must provide the request string in the **Input** tab. To do so, click the column next to **item** under **postRequest** in **XPath Expression** and provide the request string in the dropdown box.
- 4. Test the configured process using the TIBCO Business Studio for BusinessWorks debugger.

If a REST service developer has made changes to the service API after creating the service, the changes needs to be propagated to all the places where the service is used. You can check for updates to a Swagger file that has been imported into TIBCO Business Studio for BusinessWorks. The icon to the left of the Swagger file in the **Project Explorer** in the TIBCO Business Studio for BusinessWorks displays an indication that the file has been modified in its original location and the local copy of the file is not in synchronization with it source.

You can check for differences between the original Swagger file and its copy that was created when importing it into the TIBCO Business Studio for BusinessWorks. You can also compare the differences between the two and update your local copy if need be. To do so, follow these steps:

#### **Procedure**

- 1. Right-click the Swagger file under **Service Descriptors** in the **Project Explorer**.
- 2. Select Remote Interface.

The **Check for Differences** menu option checks for differences between the imported copy and its original.

The **Compare Differences** menu option first checks for differences between the imported copy of the Swagger file and its original. If there is a difference, the file appears in the **Synchronize** tab and if you double-click it there it displays the two files side by side with the differences highlighted.

The **Update Local Copy** menu item updates the copy of the file in your workspace to match its original. It also regenerates the schema.



**Note:** No changes are performed for processes that have already been created.


### **Archive Files**

After completing an application module, you must define an application to build a deployment archive file. An application defines all the processes, properties, and resources that must be included in the archive file. By default, all processes are included.


To create an archive, choose one of the following:

• Right-click the project in the **Project Explorer** and choose **Export > Studio Projects to Archive**. The **Export Project** dialog is displayed.

**Export Project Dialog** 

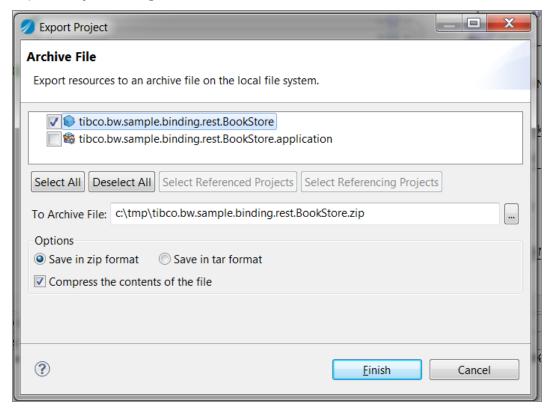


**Export Project Dialog** 

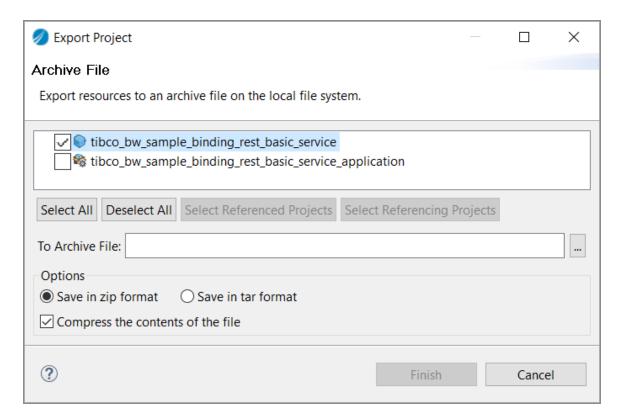

 Drag the project from the Project Explorer and drop it on a folder in the File Explorer.



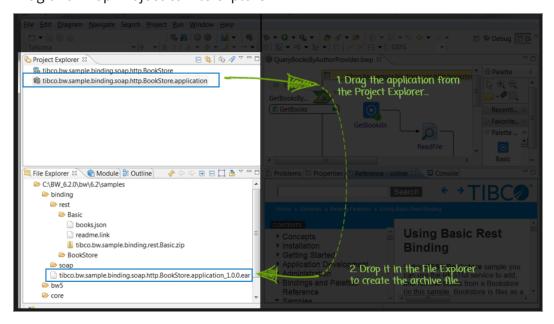


In both scenarios, and archive file is created with all required processes, properties, and resources. In the first scenario, you can name the archive file, select the format, and select

the resources to include. In the second scenario, the archive is created for you in the format appropriate for your operating environment. All required elements are included.

# Debugger


The TIBCO Business Studio for BusinessWorks debugger is used to test processes during the process development stage. By default, the debugger supports all the processes and subprocesses of an application module, shared module and nested shared module. Starting the debugger brings up the **Debug** perspective. This perspective can be used to set breakpoints, step through processes, examine job variables, and activity input/output at each step.

#### **Debug Perspective**

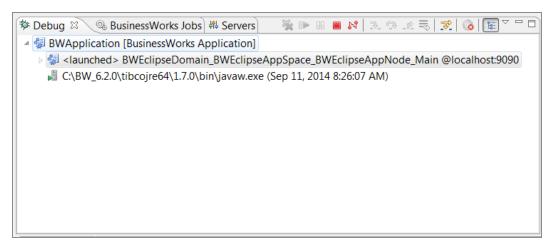


The **Console** view displays the messages and errors returned by the runtime.

#### Console View

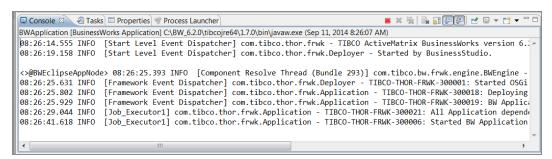

Start the debugger with the **Run > Debug** command. To stop the debugger, press the **Stop** icon on the **Debug** perspective toolbar:

#### Stop Icon in Debug Perspective

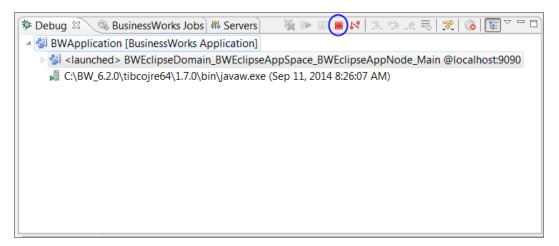

### Run Time


You can run applications in TIBCO Business Studio™ for BusinessWorks™ and test them in a runtime environment, which consists of a domain, AppSpace, and an AppNode on your local machine.

These runtime entities were created when you installed TIBCO ActiveMatrix BusinessWorks™. For more information about runtime entities, see the TIBCO ActiveMatrix BusinessWorks™ Concepts guide.

For information about the administration framework, see the *TIBCO ActiveMatrix BusinessWorks*<sup>M</sup> *Administration* guide.

To run an application in TIBCO Business Studio for BusinessWorks, choose the **Run > Run** command. (Applications can also be run with the **Run > Run Configurations** command. This option allows you to manage and launch run configurations.) The Run command opens the **Console view** where progress messages and errors are displayed.

#### Console View

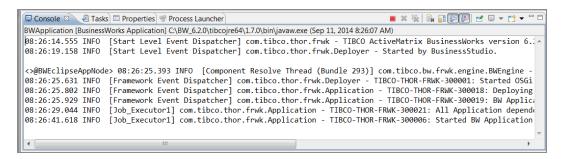

Click the **Businessworks Jobs** view in the top left to see the jobs created for the process. To stop the current job, click the **Stop** button **=** on the **Console view** toolbar.

From the **Console view**, you can use OSGi commands to monitor the running AppNode and gather metrics about your application. For information about OSGi commands, press Enter in the **Console view** to display the <>@BWEclipseAppNode> prompt. Type help to get a list of commands.

The scope is indicated along with the command. Commands with the scope bw return information about the running application. Type a command name followed by -h for information about the command. For example, the command help bw:dsr returns:

```
dsr - Diagnoses Shared Resource issues
  scope: bw
  parameters:
               Partial or full name of a Shared Resource. Case is
      String
ignored.
```



**Note:** Note: Applications can also be run from the administration framework using the bwadmin command line utility or the Admin UI. For information about the administration framework, see the TIBCO ActiveMatrix BusinessWorks™ Administration guide.

# Deployment

Applications can be deployed from TIBCO Business Studio™ for BusinessWorks™ using either the **Deployment Wizard** or the **Deployment Server**.

The **Deployment Wizard** is available from the right-click menu once an archive file has been created. You need to provide the name and port for the network to which you want to deploy to, as well as the domain and AppSpace for deployment.

The Deployment Server is a pre-built deployment environment that consists of domains, AppSpaces, and AppNodes. Archive files have been uploaded to this server and applications are ready for deployment.

Network configuration for either a local network or the deployment server is available from the **Deploy view** in TIBCO Business Studio for BusinessWorks.

For more information about deployment in TIBCO Business Studio for BusinessWorks, see theTIBCO ActiveMatrix BusinessWorks™ Application Development guide.



Note: Note: Applications can also be deployed from the administration framework using the bwadmin command line utility or the Admin UI. For information about the administration framework, see the TIBCO ActiveMatrix  $BusinessWorks^{TM}$  Administration guide.

### File Poller Tutorial

This tutorial guides you through creating a File Poller project. This simple project can perform many of the same tasks as those required for a project with a larger scope and more complexity. The File Poller project polls a directory for a specified file and writes a new file to the same directory each time the file is modified.

#### This tutorial involves:

- Creating a New Project
- Configuring the File Poller Project
- Testing the FilePoller Application in the Debugger

# Creating a New Project


This section guides you through creating a simple project.

#### **Procedure**

- 1. Start TIBCO Business Studio™ for BusinessWorks™:
  - a. On Unix: Select the TIBCO Business Studio for BusinessWorks executable located at \$TIBCO\_HOME/studio/version/eclipse/
  - b. On Windows: Start > All Programs > TIBCO > TIBCO\_HOME > TIBCO Business Studio for Designers
- Launch the BusinessWorks Application Module wizard from File > New > BusinessWorks Resources.

The BusinessWorks Resource Wizard opens.

3. In the Select a wizard dialog box, select BusinessWorks Application Module and click Next. The wizard is displayed:

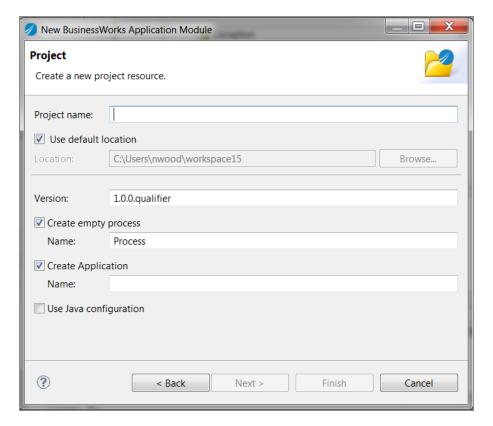


In the Project name field, enter FilePoller
 Keep the Use default location, Create empty process, and Create Application check boxes selected.

5. Click Finish.

#### Result

Two folders are created and are visible in the **Project Explorer**, one for the application and one for the application module.

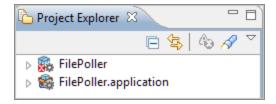

# Configuring the FilePoller Project

The FilePoller project uses a **File Poller** activity and a **Write File** activity. This project creates a simple process that points to a specified file. The file is polled periodically to

determine whether it was changed. The changed file comprises the text written to a new file.

The File Poller and Write File activities in the File palette are used in this process.

#### **Before You Begin**


A text file is required, for example, c:\tmp\fileread.txt. Type a few lines in the file and save it.

#### **Procedure**


 Select and drop a File Poller activity from the File palette to the Process Editor window.

To add an activity to the **Process Editor**, click the activity and drop it on the **Process Editor**. Do not drag and drop the activity.

2. Select the **Write File** activity from the **File** palette. Click in the **Process Editor** next to the **File Poller** activity. You see a gray overlay indicating where you can place the activity, along with the transition arrow. When you drop the activity, the transition from the **File Poller** activity to the **Write File** activity is created.

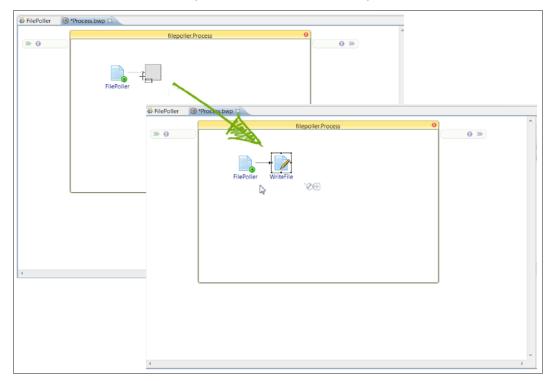

- **Note: Note:** To create a transition between two activities click the transition icon and join both the activities in the Process Editor.
- 3. Select the **File Poller** activity. In the **Properties** tab, select the **General** tab. Point to the file you created as a prerequisite to this tutorial.
- 4. Select the **Include Existing Files** check box. When selected, the **File Poller** activity polls the existing file regardless of the changes made. The specified file is periodically polled at the specified interval even if the file has not changed. These changes may pertain to modifying, creating, or removing the file.

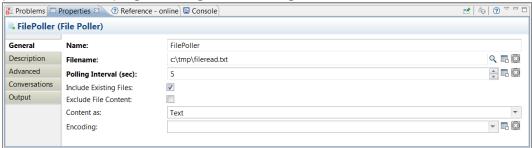



**Note:** Note: The Polling Interval (sec): 5 (default) indicates the Frequency with which the File Poller activity monitors this particular file. Any update to this file is transferred to the output.log file through the **Write File** activity.

- 5. Save your project. Click **File > Save** or the **Save** button on the tool bar.
- 6. Select the **Write File** activity and click the **General** tab.
- 7. Click the subtton in the **Filename** field and specify the output location, such as, c:\tmp\FilePoller\output.log. Also, select the **Create Non-Existing Directories** check box.
- 8. Click the **Input** tab to specify input to the **Write File** activity. Drag the FilePoller\fileContent\textContent from the **Data Source** pane into the textContent field in the **XPath Expression** pane. This writes the content of the polled file to the output file.

- 9. Save your project.
- 10. Test this project in the debugger. For more information about the testing procedure, see Testing the File Poller Application in Debugger.

#### Result

The **File Poller** activity polls the fileread.txt file located in c:\tmp file every 5 seconds and any changes made to the file content are written to the output.log file at c:\tmp\FilePoller by the **Write File** activity.

# Testing the FilePoller Application in the Debugger

The debugger provides a simple and fast way of debugging one or more TIBCO ActiveMatrix BusinessWorks™ applications in a local runtime environment. The applications must be in the workspace and selected before launching the debugger. After starting the debugging session, the debugger does not provide tooling support for deploying and debugging the application on the same runtime instance. The runtime starts when the debugger is started and stops when the debugger is stopped.


#### **Procedure**

1. Right-click in the **Process Editor** and select the **Debug BusinessWorks Applications** option from the menu. You can also click to start the debugger or choose **Run > Debug**.


The following messages are displayed in the **Console view**.

You are running the instance of the FilePoller application. When the debugger is launched, the perspective changes from **Modeling** to **Debug**.


- 2. After the application starts, the **File Poller** and **Write File** activities get triggered and the content of the fileread.txt is written to c:\tmp\FilePoller\output.log.
- 3. Modify the c:\tmp\fileread.txt file. For example, open the c:\tmp\fileread.txt file and write "Hello BusinessWorks!" and save the changes.
  - The **File Poller** activity polls every 5 seconds and transitions the contents of the fileread.txt to the **Write File** activity.
- 4. Open the file c:\tmp\FilePoller\output.log and verify the updated information, for example, "Hello BusinessWorks!" printed in this file.
  - While keeping the application running, explore adding and deleting the words in the fileread.txt file and notice the corresponding changes made to the output.log file.
- 5. The path taken by the engine for executing the process is displayed. Transitions turn green to specify that a path was executed.

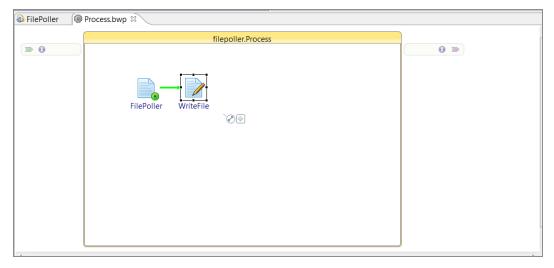

6. Click the Businessworks Jobs view on the top left to see the jobs created for the



7. Click a particular activity, then click the **Job Data** view on the top right to see the input and output data of the activity.

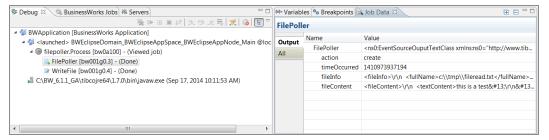

8. To stop the current job, click the **Stop** button <a> on the **Console view** toolbar.</a>

The REST Bookstore sample lets you explore the REST tooling in TIBCO Business Studio for BusinessWorks. You can import the REST Basic sample into TIBCO Business Studio for BusinessWorks through **File Explorer** and examine the project and the solution implemented by it.

The REST Bookstore sample uses the RESTful service to add, and retrieve books from a Bookstore. This sample uses two REST methods: POST and GET.

Here's an overview of the steps involved to create and test a REST service:

#### **Procedure**

- 1. Create a new application.
- 2. Obtain a schema for the project.
- 3. Create a REST service.
- 4. Test the REST service

# Create a new Application

You start by creating a new application in the TIBCO Business Studio for BusinessWorks that will contain the service.

#### **Procedure**

- 1. Click the **Create a new BusinessWorks Application** icon ( in the tool bar.
- 2. Enter books in the **Project name** text box.
- 3. Make sure that the **Create Application Module** check box is selected and click **Finish.**

This creates an application called "books" and a module, **books.module**.

4. Expand the **books.module** folder completely and delete the **Process.bwp** process, the default process, which got created along with the books module. You will create a new module later in this tutorial.

# Obtain a Schema for the REST Service

#### Procedure


- 1. In the File Explorer view, open binding > rest > Basic folder.
- Double-click tibco\_bw\_sample\_binding\_rest\_basic.zip.
   This opens the REST Basic application in the Project Explorer.
- 3. In the **Project Explorer**, expand the **tibco\_bw\_sample\_binding\_rest\_basic** folder, then expand the **Schemas** folder under it.
- 4. Copy the Books.xsd schema and paste it into the **books.module > Schemas** folder.

### Create a REST Service


#### Procedure

 In the Project Explorer, right-click books.module > Processes and select New > BusinessWorks REST Resource.

The REST Service Wizard window is displayed.

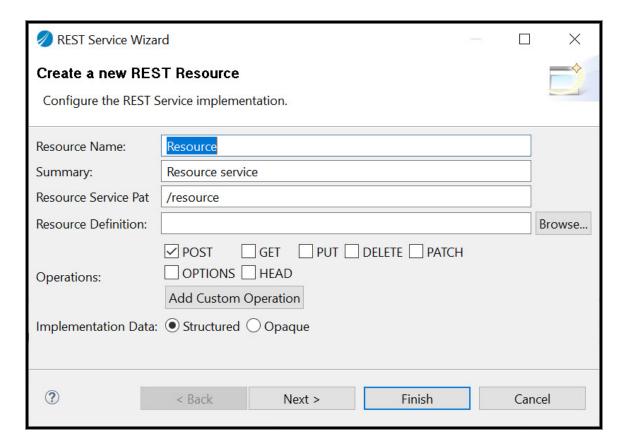


- 2. Enter a resource name in the **Resource Name** text box.
- 3. Select the **Single** radio button for **Type of Resource**, since you are creating one book.
  - If you were creating multiple books, you would need to select the **Collection** radio button.
- 4. Click the **Browse** button next to the **Resource Definition** text box to navigate and select a resource from the Books.xsd schema.
  - This opens the Select Schema Element Declaration dialog with the **books.module** expanded to expose the **Book** element in the Books.xsd schema.
- 5. Click the **Book** element to select it and click **OK**.

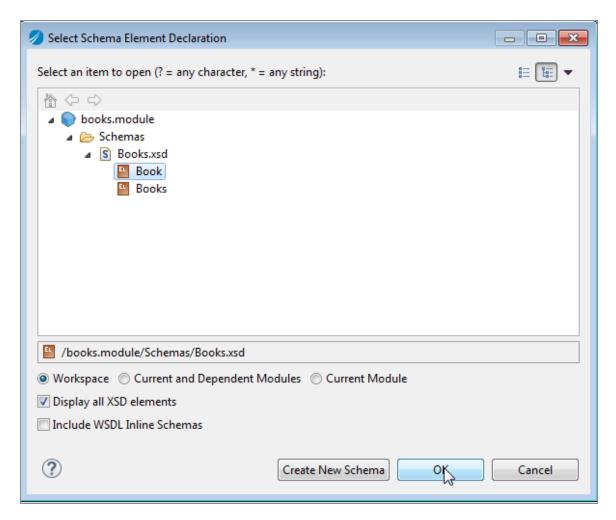


Next, you create a POST operation for the service.

- 6. Select the **POST** check box next to the **Operations** field in the REST Service Wizard and click **Next**.
  - By default, the POST operation is configured with a request to add a book and output a response with the book details.
  - We will configure the response to output a message instead of the book details.
- 7. Click the drop-down menu for **Response** and select **String** to replace **Book**. You will configure this response string later in this tutorial. This string will be output as a response to the POST request if the request is successful in creating the book.

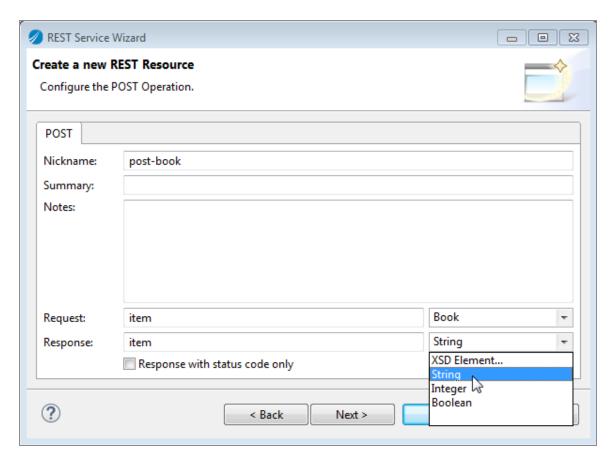

8. Click Finish.

This creates a process called **Book.bwp** which contains a POST operation and a reply which the user will receive when he/she executes the POST operation. You will configure this reply in the next step.




9. Click the **postOut** icon in the **Process Editor** to configure the reply for the POST operation.

The **postOut** properties display in the **Properties** view.

10. Click the **Input** tab in the **Properties** view and expand **\$post** in the **Data Source** tab

completely.

- 11. Click the **XPath Expression** column next to **item** to enter the response string that you want the POST operation to return on its success.
- 12. Enter concat('Created ', <drag\_name?\_from DataSource\_tab\_here > ). This concatenates the name of the book to your reply string.

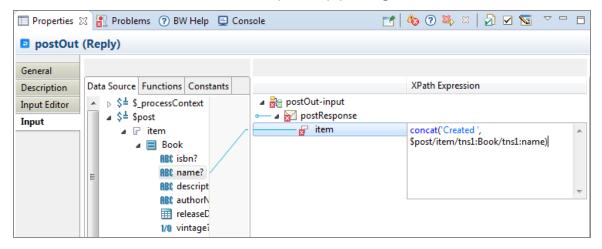

On success, the POST operation will return a response, Created <name\_of\_the\_book>.

Now you must save the book that you created, so that it can be reused at a later time. Create a shared variable for it and save it in a shared variable.


13. Expand the **Module Descriptors** folder in the **Project Explorer** and double-click **Shared Variable**.

This opens the **Shared Variables** configuration view. The shared variable allows you to pick a schema element and create a variable for it.

14. Click the button that allows you to pick a schema element (E).

The **Select Schema Element Declaration** dialog opens.


15. Select **Book** within the **Books.xsd** schema and click **OK**. A shared variable gets created with the default name, moduleSharedVariable.

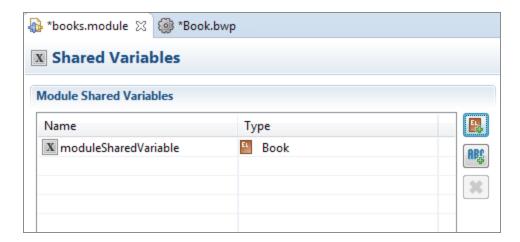


16. Click **moduleSharedVariable** under the **Name** column to rename it to a meaningful name.

The **Properties** view opens with the **General** tab displayed.

17. Overwrite the Variable Name value in its text box with book.

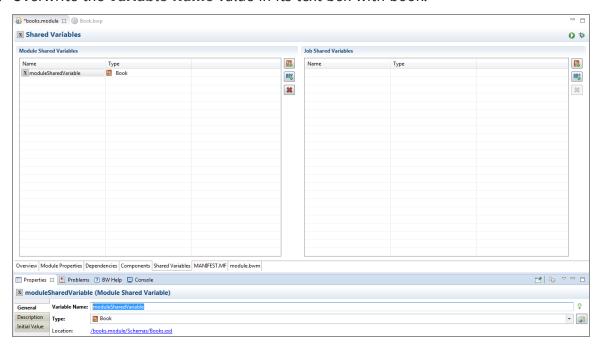

18. Click the **Book.bwp** tab in the **Process Editor** to bring it forward.

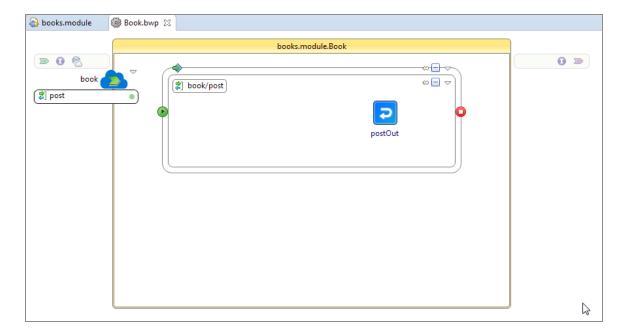


19. Click the Module explorer tab and expand the Module Shared Variables folder.



20. Drag and drop the book variable to the **Book.bwp** process in the **Process Editor**.

When prompted, select **Create a SetSharedVariable activity** to associate the book with the shared variable you created. This shared variable will be stored in the module. Connect the **SetSharedVariable** activity to the **postOut** activity, which allows the reply from the POST operation to read the shared variable.

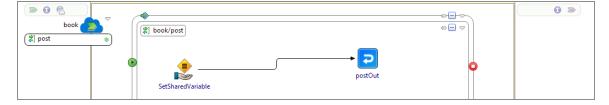

- 21. Click the **SetSharedVariable** activity icon to open its properties in the **Properties** view
- 22. Expand the **\$post** node and drag the **Book** item on to the **Book** variable under the

**SetSharedVariable-input** and select **Make a copy of "Book"** when prompted and click **Finish**.

This allows a copy of the book that you post to reside in the shared variable.



Now that you have created a book and stored it in a shared variable, you can create another REST operation, GET, to access the book.


23. Click the down arrow next to the book service and then click **Create REST Operation**.

This opens the REST Service Wizard and with the GET operation selected by default.




24. Click **Browse** next to the **Resource Definition** text box and select the **Book** element under **Books.xsd** and click **OK**.

Click **Finish** in the wizard to create the **get** operation and a reply (**getOut**) for the operation.

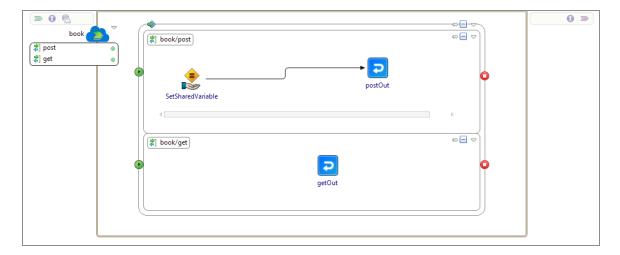


25. Create a **GetSharedVariable** activity by dragging the book variable from the **Module Shared Variables** in the **Module** explorer to the get operation in the **Process Editor**. Connect the **GetSharedVariable** activity to the **getOut** reply.

This allows the book that is stored in the **Shared Variables** to be returned by the **getOut** reply.

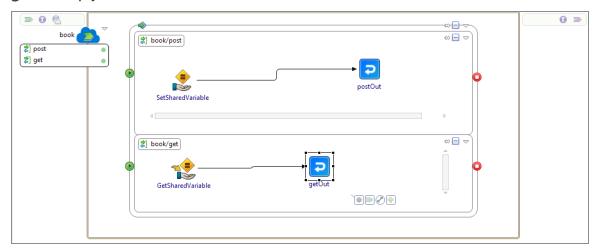

- 26. Click the **getOut** reply to configure it.
  - The **getOut** properties opens in the **Properties** view.
- 27. Drag and drop \$GetSharedVariable from the DataSource tab on to Book under the getResponse item. Select Make a copy of "Book" when prompted and click Finish.

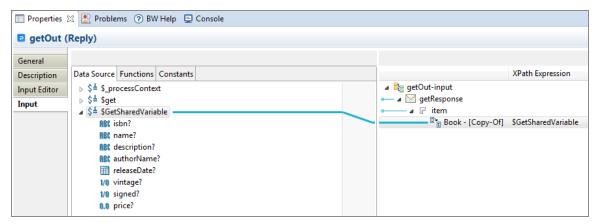

You have now configured the response to the GET operation which will return the book created by the POST operation.

# Testing the REST Service

#### **Procedure**




Note: Note: The Swagger framework used to test the REST service is accessed using the port specified by the bw.rest.docApi.port property in the <TIBCO\_HOME>\bw\<version>\domains\<domain name>\appnodes\<appspace name>\<appnode name>\config.ini file. By default, this property is set to port 7777. If you have multiple REST applications running on separate AppNodes on a single machine or server, you must configure these port numbers to be unique for each AppNode. To do so, edit the bw.rest.docApi.port property in the config.ini file for each AppNode.

If there are multiple REST applications running within a single AppNode, there is no need to configure this port.

- In the Project Explorer, expand the Resources folder fully and double-click Book.httpConnResource to configure the HTTP Connector resource that was created when you created the application.
  - The **HTTP Connector** properties page opens in the **Project Editor**. By default, the **HTTP Connector** resource is set to run on your localhost and port 8080. You can configure a different port here if the 8080 port is already in use.
- Run the application by right-clicking anywhere in the Book.bwp tab in the Process Editor and selecting Run BusinessWorks Applications. By default, it will run locally

and create a REST service that has two operations, POST and GET. You can see the progress of the Run command in the Console view.

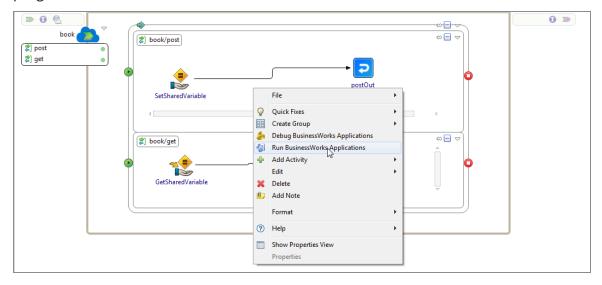


When the command completes you will see a message such as Started BW Application [books:1.0]

3. Enter Irestdoc in the **Console** and press Enter. The command returns a URL for the book resource.

```
<>@BWEclipseAppNode> lrestdoc
[Application Name]: books
[Discovery Url]: http://<localhost>:7777/books
```

4. Copy the Discovery URL from the lrestdoc command output, open a browser and paste the URL in its address box.

The Swagger page for the books resource opens. Click the **Book** link to expose the operations it supports.

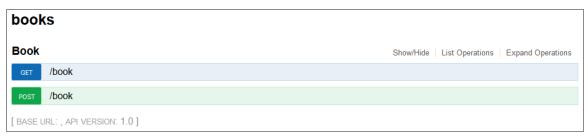


/book) to expose its 5. You can start by testing the POST operation. Click **POST** (Post details.

6. Click anywhere in the data description for the book (contained in a light yellow background box) under **Model Schema**.


The schema opens for editing in the **Book** text box.

7. Set values for the fields, for example, enter an ISBN number, name of the book, and maybe a brief description.

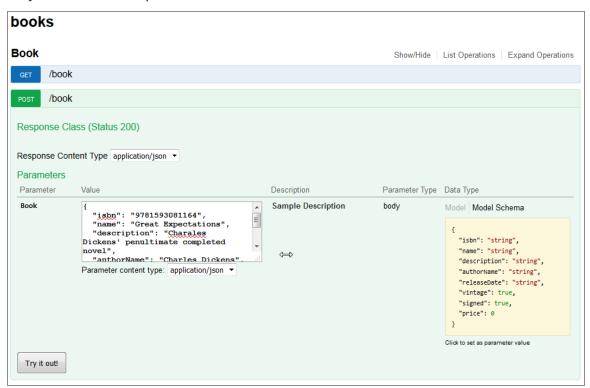

8. Click the Try it out! button.

You will see a reply saying Created Great Expectations.

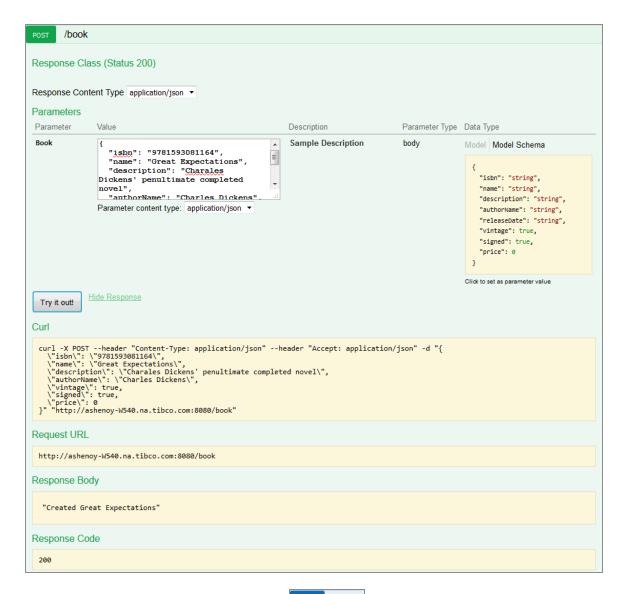

- 9. Test the GET operation. Click the GET (GET /book) to view its details.
- Click the **Try it out!** button under GET.It returns the book that you just posted.

# Installing PostgreSQL

This topic explains how to install the PostgreSQL database and create the database and tables required for the Bookstore tutorial.

#### **Procedure**

Download and install PostgreSQL from http://www.postgresql.org/download/
 Note the superuser password that you create as part of the installation process.

**Note:** Note: If installing on Windows, do not install or run as Administrator.

- 2. Open a terminal window and navigate to the root folder of the PostgreSQL installation. Open pg-env.bat and verify the path settings. Save the file if you make changes.
- 3. Start the server. Navigate to the bin folder of the install directory and type: pg-ctrl start
  - Enter the password you created for the superuser.
- 4. Open another terminal window and navigate to the BW\_ HOME\samples\binding\rest\BookStore\scripts folder. Open readme.txt. On Unix systems, use the first command in the readme to start the script from the **psql** window. On Windows, copy the second command to start the script from the command line.
- 5. Navigate to the PostgreSQL bin folder and paste the command line into the terminal window. Modify the command as needed. For Windows, use forward slashes in the command.
  - Run the command to create the database, the database tables, and to populate the database.
- 6. Open the PostgreSQL pgAdmin UI utility to see the database and tables.

# **Creating a New Process**

These steps show how to create a new process.

#### **Procedure**


- 1. Open TIBCO Business Studio™ for BusinessWorks™.
- 2. Open the **Design** perspective by clicking Design in the upper right.
- Click the File Explorer tab. If the tab is not visible, click Window > Show View >
   Other > FileSystem > File Explorer and click OK.
- 4. Click **File > Switch Workspace** and select or open a clean new workspace.
- 5. In the samples directory, select **binding > rest > Bookstore** and double-click

This opens the project in the **Project Explorer**.

- 6. In the **Project Explorer**, expand the **tibco.bw.sample.binding.rest.BookStore** project.
- 7. You can also import the sample using the File > Import > General > Existing Studio Projects into Workspace > Select Archive File > Browse option.
- 8. The project is displayed in the **Project Explorer** panel on the left.




9. Expand the folders in the project to see all the project processes and resources. For more information on folder structure, see the TIBCO ActiveMatrix BusinessWorks™ Application Development guide .

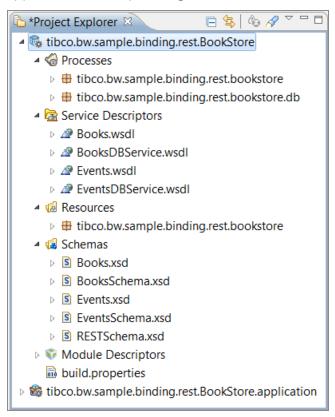

10. Expand **Processes** and then expand **tibco.bw.sample.binding.rest.bookstore.db**.

0


**Note:** Note: The .bwp extension indicates that it is an ActiveMatrix BusinessWorks™ process.

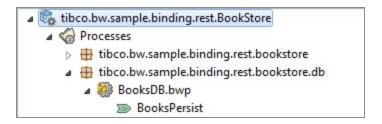

11. Double-click BooksDB.bwp.


The process comprises:

- Green chevron on the left indicates the service details.
- addBooks, getAllBooks, and so on indicate the operations implemented by this process.
- Each operation is implemented separately.

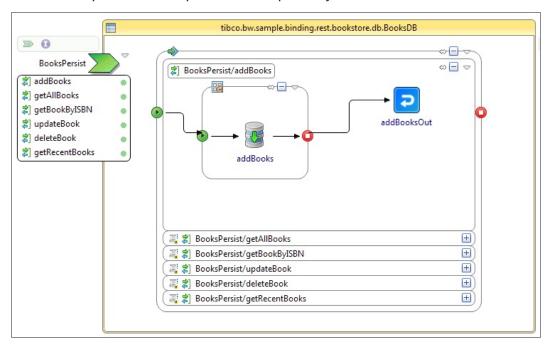


Double-click an operation to display the process for example, BooksPersist > addBooks.


- a. In the addBooks operation, you can see a JDBC activity.
- b. The activity is repeated using a ForEach group.
- c. addBooksOut represents the **Reponse** to the web service request.
- 13. To add a new process package named tibco.bw.sample.rest, right-click on **Processes** in the **Project Explorer** view, and select **New > BusinessWorks Package**.

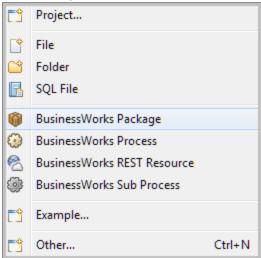

14. In the BusinessWorks Package screen, specify tibco.bw.sample.rest in the **Name** field.



15. Click **Finish** and verify that the new package tibco.bw.sample.rest has been added in the **Project Explorer** view.

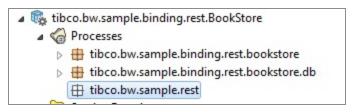

# Building a REST Service


This section details how to build a REST service.

### **Before You Begin**

The **tibco.bw.sample.binding.rest.BookStore** sample is loaded in the Project Explorer.

#### **Procedure**


 To define a REST Resource named MyBooks, select tibco.bw.sample.binding.rest.BookStore > New > BusinessWorks REST Resource.
 The REST Service Wizard window is displayed.

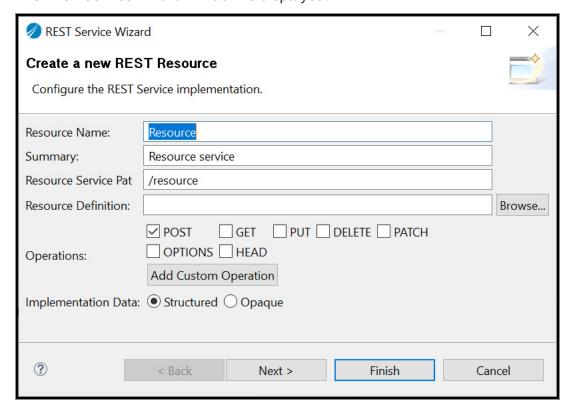

- 2. Specify the following values in the REST Service Wizard window.
  - a. **Resource Name**: MyBooks
  - b. **Summary**: Summary about the new REST service. (default)
  - c. Resource Service Path: Auto-filled
  - d. **Resource Definition**: Select **Browse > Schemas > Books.xsd > Books** in the Select Schema Element Declaration window.
  - e. **Operations**: Select POST and GET check boxes.
  - f. Implementation Data: Accept the default value of Structured.

#### 3. Click Finish.

This creates a new process MyBooks.bwp process is opened in the Process Editor.

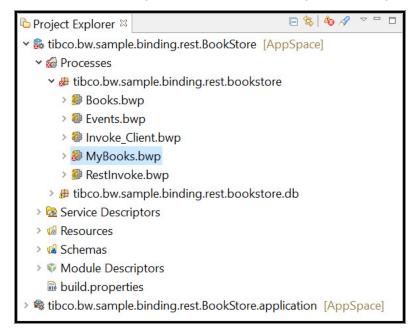


4. Open the **tibco.bw.sample.binding.rest.bookstore.db** package in the **Project Explorer** and select the **BooksDB.bwp** process. Drag it to the **Process Editor** and drop it on the implemented POST operation.

A menu is displayed with two options: Create Invoke Activity and Create Reference and Wire Process.


### 5. Select Create References and Wire Process.

The references are added to the process. The purple chevron indicates the service and its operations that can be referenced by the process.

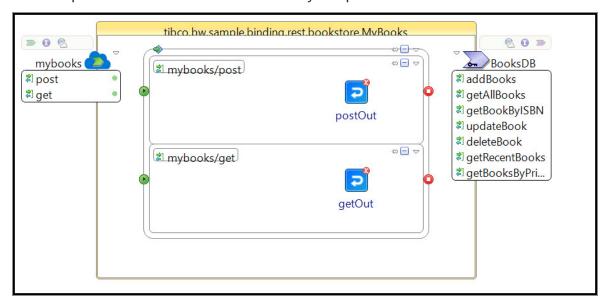


- 6. To update the POST process to invoke the appropriate external service operation:
  - a. Click the addBooks operation.
  - b. Select and drag the operation to the left of the **postOut** activity and drop it. An Invoke process activity is created.


7. Click the newly added activity. Select the icon and connect addBooks to




8. Click the **getAllBooks** operation and select, drag, and drop the operation to the left of the **getOut** activity in the OUT process.

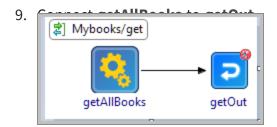

- 10. Save your changes.
- 11. Click the addBooks activity and select Properties > Input.
- 12. Expand the data tree in the **Data Source** pane to locate the Book element.

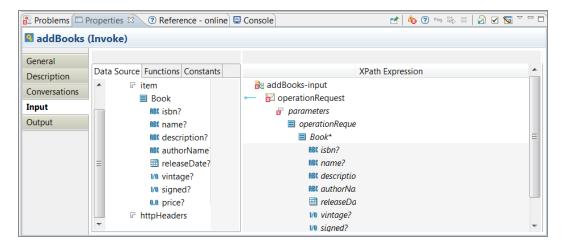


- 13. Drag the Book element from the left to the Book\* element on the right.
- 14. In the pop-up window, select Make a Copy of each "Book" and click Finish. The **Input** tab looks like this:

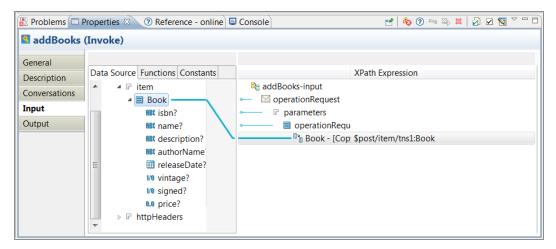


- 15. Save your changes.
- 16. Click the **postOut** activity and open the **Properties > Input** tab. Expand the **post** activity and drag the Book\* element from left to right.
- 17. In the pop-up window, select the **For each** option and click **Next**. Click **Finish** on the **Auto-Map** window. The **Properties > Input** tab looks similar to this:

- 18. Click **getAllBooks** and select **Properties > Input**.
- 19. In the **XPath Expression** pane, add a dummy value to the input element, such as, "Get All Books". The input must be in quotes.

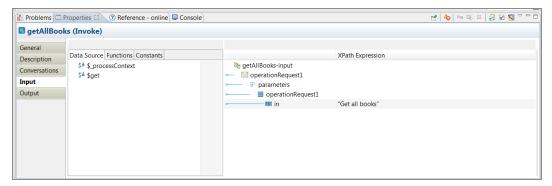

20. Click the **getOut** activity in the **Process Editor**, and select the **Properties > Input** tab. Expand the **getAllBooks** activity and choose Book\* to map the Book\* element from left to right. In the pop-up window, choose **Make a Copy of each " Book"** and click **Finish**. The tab looks similar to this:



#### Result

Your project is complete without any errors.

# Testing the REST Service


You can now test the REST service using the built-in tester and the Swagger UI.

#### **Procedure**

Note: Note: The Swagger framework used to test the REST service is accessed using the port specified by the bw.rest.docApi.port property in the <TIBCO\_HOME>\bw\<version>\domains\<domain name>\appnodes\<appspace name>\<appnode name>\config.ini file. By default, this property is set to port 7777. If you have multiple REST applications running on separate AppNodes on a single machine or server, you must configure these port numbers to be unique for each AppNode. To do so, edit the bw.rest.docApi.port property in the config.ini file for each AppNode.


If there are multiple REST applications running within a single AppNode, there is no need to configure this port.

- In the Project Explorer, expand the tibco.bw.sample.binding.rest.BookStore.application process and expand the Package Unit > Properties folder.
- 2. In the **Properties** window, open the **tibco.bw.sample.binding.rest.BookStore** process and set the default **ApplicationProfile** to match the operating system you are running on. The bracketed profile in the column head is the one that is selected:

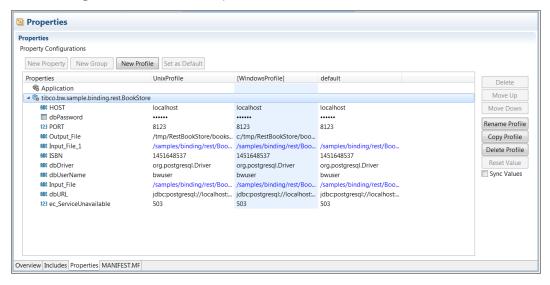

- Provide valid values for the application properties including a valid user name, password, and database URL to connect to your PostgreSQL database if different from the default setting.
- 4. Verify your JDBC connection.

- Expand the Resources folder in the Project Explorer for the tibco.bw.sample.binding.rest.BookStore process.
- b. Double-click JDBCConnectionResource.jdbsResource.
- c. In the JDBC Driver section of the window, click Test Connection to verify the connection. If you change the JDBC driver folder from the default, click Click Here to Set Preferences and set the JDBC driver folder to the folder where you downloaded PostgreSQL JDBC Driver.

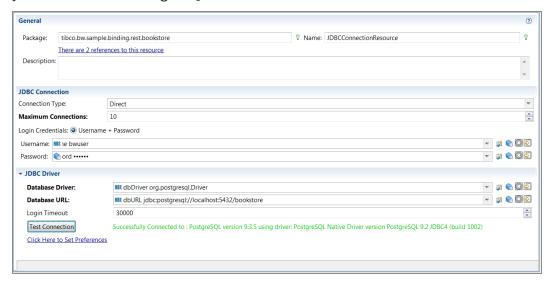


- 5. Click File > Save.
- 6. In the **Project Explorer**, expand the **Processes** directory if it is not expanded and double-click **MyBooks.bwp**.
- 7. Click Run > Debug Configurations.
- 8. In the left-hand tree of the **Debug Configuration** wizard, expand **BusinessWorks Application** and select **BWApplication**.
- Click the Applications tab and then click the Deselect All button if you have multiple applications. Select the check box next to tibco.bw.sample.binding.rest.BookStore.application.
- 10. Click **Debug**. This runs the sample in **Debug** mode.
  - The **Console view** is opened and shows engine messages similar to: Started BW Application [tibco.bw.sample.binding.rest.BookStore.application:1.0].
- 11. In the Console view, press Enter to display the prompt: <>@BWEclipseAppNode>

Enter the OSGi command lrestdoc. This lists the Swagger UI URL as the discovery URL: [Application Name]: tibco.bw.sample.binding.rest.BookStore.application [Discovery Url]:

http://localhost:7777/tibco.bw.sample.binding.rest.BookStore.application

- 12. Launch the Google Chrome browser.
- 13. Open http://localhost:7777/tibco.bw.sample.binding.rest.BookStore.application
- 14. Click Books or Events to see the operations. Click MyBooks to see the REST service operations you just added. For more information, see the section Testing the POST and GET Operations.

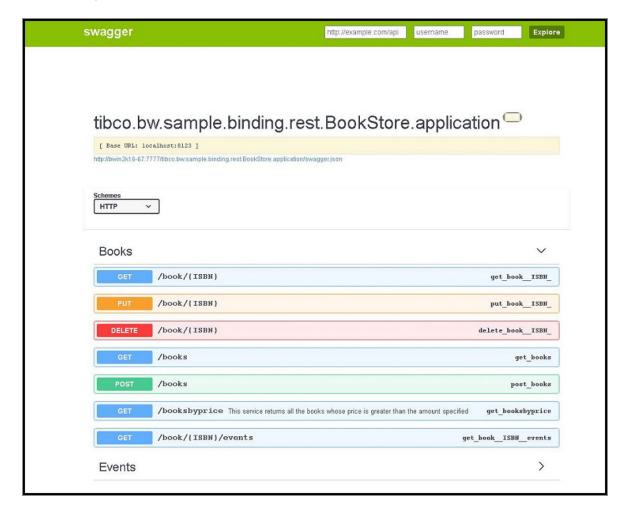

15. Expand the Books and Events headers, and test out the operations as listed below.

#### Result

Click **Books** or **Events** in the Swagger UI to view the following operations for Books and Events:

#### **Books**

- Post books
- GET books
- GET book by ISBN
- PUT book by ISBN
- DELETE book by ISBN

#### **Events**

- POST Events
- GET Events
- GET Event by EventID
- PUT Event by EventID
- DELETE Event by EventID

**GET books** returns an output similar to the following:

```
"Book": [
    "isbn": "0061122416",
        "name": "The Alchemist",
        "description": "Every few decades a book is published that changes
the lives of its readers forever. The Alchemist is such a book",
        "authorName": "Paul Coelho",
        "releaseDate": "2006-04-25",
        "vintage": true,
        "signed": true,
        "price": 11.9
},
{
        "isbn": "0071450149",
        "name": "The Power to Predict",
        "description": "How Real Time Businesses Anticipate Customer
```

**GET books** by ISBN returns an output similar to the following for ISBN 0061122416:

```
"isbn": "0061122416",
    "name": "The Alchemist",
    "description": "Every few decades a book is published that changes
the lives of its readers forever. The Alchemist is such a book",
    "authorName": "Paul Coelho",
    "releaseDate": "2006-04-25",
    "vintage": true,
    "signed": true,
    "price": 11.9
}
```

The books.log file is generated with the following information:

```
POST Books---->{"Book":[{"isbn":"1451648537","name":"Steve
Jobs", "description": "Biography of Apple Co-Founder Steve
Jobs","authorName":"Walter Isaacson","releaseDate":"2012-10-
24", "vintage": false, "signed": false, "price": 21},
{"isbn":"0385537859", "name":"Inferno", "description": "Robert Langdon
returns in Dan Brown's latest fast paced action
thirller", "authorName": "Dan Brown", "releaseDate": "2013-05-
14", "vintage": false, "signed": true, "price": 14.09},
{"isbn":"0399103421", "name":"The Godfather", "description": "The Godfather"
is an epic story of a New York's top mafia family, loyalty, and how men
of honor live in their own world, and die by their own
laws.", "authorName": "Mario Puzo", "releaseDate": "1969-03-
10", "vintage": true, "signed": true, "price": 5
0}]}************************
GET Books---->{"Book":[{"isbn":"1451648537","name":"Steve
Jobs", "description": "Biography of Apple Co-Founder Steve
Jobs", "authorName": "Walter Isaacson", "releaseDate": "2012-10-
24+05:30", "vintage": false, "signed": false, "price":21},
```

```
{"isbn":"0385537859","name":"Inferno","description":"Robert Langdon
returns in Dan Brown's latest fast paced action
thirller", "authorName": "Dan Brown", "releaseDate": "2013-05-
14+05:30", "vintage": false, "signed": true, "price": 14.09},
{"isbn":"0399103421", "name": "The Godfather", "description": "The Godfather
is an epic story of a New York's top mafia family, loyalty, and how men
of honor live in their own world, and die by their own
laws.", "authorName": "Mario Puzo", "releaseDate": "1969-03-
10+05:30", "vintage":true, "signed":true, "price":5
0}]}*********************
GET Book By ISBN----->{"isbn":"1451648537","name":"Steve
Jobs", "description": "Biography of Apple Co-Founder Steve
Jobs","authorName":"Walter Isaacson","releaseDate":"2012-10-
24+05:30", "vintage":false, "signed":false, "price":2
1}*********************
DELETE Book By ISBN---->"Deleted book with ISBN -
145164853
7"********************
GET Events By ISBN---->
```


## Testing the POST and GET Operations

An available RESTful service displays the GET operation in the Swagger UI. The POST operation is tested using the JSON service. It is important to test these operations by doing some simple tasks. This section explains how to test the POST and GET operations you just added.

#### **Procedure**


1. Click books.

It expands and displays the POST and GET operations.

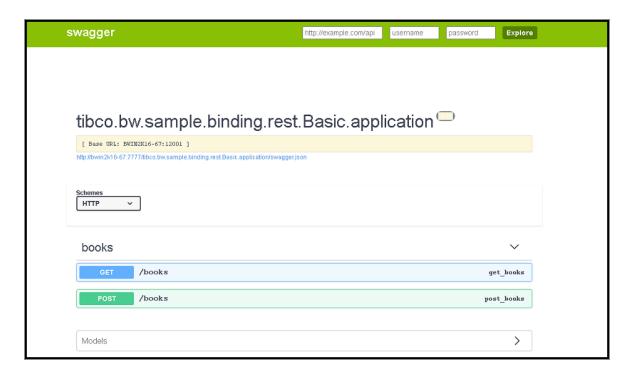

- 2. Click the **POST** icon to display its details.
- 3. Click the Try it out! button.
- 4. Provide values to the Books parameter and then click **Execute** button. You can use the JSON payload in the <BW\_HOME>\samples\binding\rest\BookStore\samplejson folder.
- 5. Now click the **GET** icon to display its details.
- 6. Click the Try it out! button.
- 7. Click the **Execute** button.

The response displays a list of books returned by the REST service from the database.

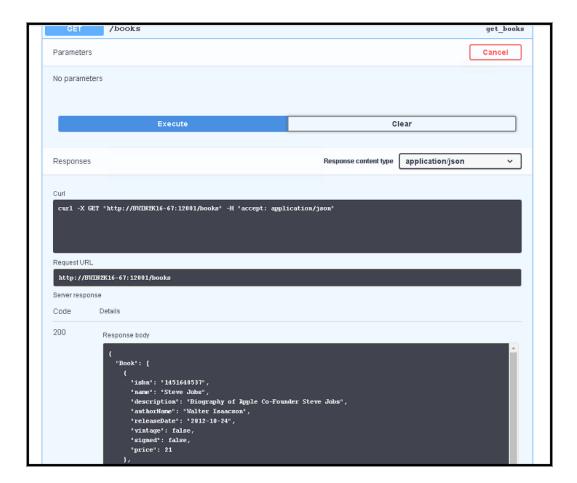

8. After you have finished, go back to TIBCO Business Studio<sup>™</sup> for BusinessWorks<sup>™</sup> and click In the **Console view** to stop the process.

## Testing the REST Service in OpenShift


You can deploy the REST service in OpenShift environment and test by using the built-in tester and the Swagger UI.

### **Before You Begin**

Ensure that the OpenShift environment is set up to deploy the application.

### **Procedure**

 In the Project Explorer, expand the tibco.bwce.sample.binding.rest.BookStore.application process and expand the Package Unit > Properties folder.  In the Properties window, expand the tibco.bwce.sample.binding.rest.BookStore.application and set the default Application Profile to Docker as shown in the following image:

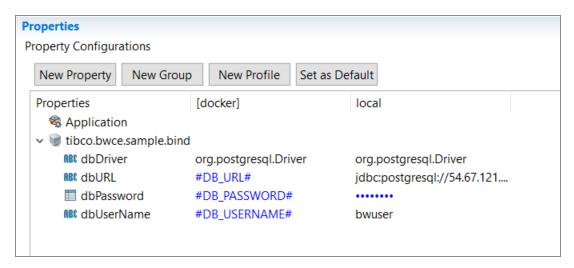

- 3. Expand the Package Unit and select Overview.
- 4. In the **Overview** window select **Export Application for Deployment**.
- 5. In your Docker environment, navigate to the directory containing your EAR file.
- 6. To login to the OpenShift environment, run the following command:

```
oc login <OpenShift_Server_URL>
```

7. If the project is not created, create an OpenShift project by running the following command:

```
oc new-project <PROJECT_NAME>
```

8. To build an application docker image, run the following command:

```
docker build -t <APPLICATION_NAME> .
```

9. To tag an application docker image with your docker repository, run the following command:

docker tag <aPPLICATION\_IMAGE\_NAME><DOCKER\_REPOSITORY\_NAME>/<aPPLICATION\_IMAGE\_

NAME>

10. To push a docker image to the docker repository, run the following command.

docker push <DOCKER\_REPOSITORY\_NAME> / <APPLICATION\_IMAGE\_NAME>



**Note:** Note: Here the docker hub registry is used to push the docker image. You can push images to OpenShift internal registry or any other public registry.

11. To use the OpenShift configuration file (YAML or JSON) and push the application on OpenShift, run the following command.

oc create -f <MANIFEST\_FILENAME>

```
apiVersion: v1
kind: Service
metadata:
 name: restapp
 labels:
   app: restapp
spec:
  type: LoadBalancer
 ports:
  - port: 80
   targetPort: 8080
 selector:
   app: restapp
apiVersion: v1
kind: ReplicationController
metadata:
 name: restapp
 replicas: 1
 selector:
   app: restapp
  template:
   metadata:
     name: restapp
      labels:
        app: restapp
     containers:
        - name: restapp
         image: <DOCKER_REPOSITORY_NAME>/<APPLICATION_IMAGE_NAME>
         imagePullPolicy: Always
         env:
         - name: BW LOGLEVEL
           value: ERROR
         - name: DB_URL
           value: <supported database>://<username:password>@<machine:port>/<database name>
         - name: DB_USERNAME
           value: <username>
          - name: DB PASSWORD
           value: <password>
          ports:
            - containerPort: 8080
```

12. To create a route for application, run the following command.


```
oc expose service <APPLICATION_SERVICE_NAME>
```

```
C:\Users\rubirada\Downloads>oc expose service restboostore
route "restboostore" exposed
```

13. To view the route of an application, run the following command:

```
oc get route
```

14. Open the Google Chrome browser and open http://ROUTABLE\_URL/swagger.

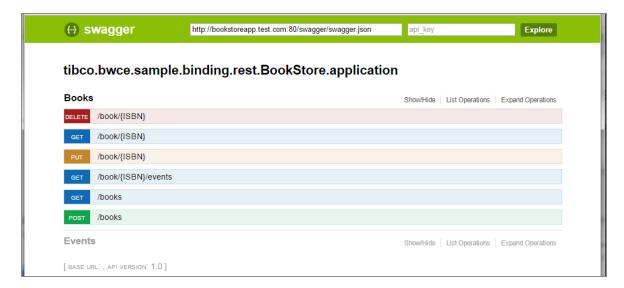

- 15. In the Swagger UI, click **Books** or **Events** to see the operations and then click **MyBooks** to see the REST service operations you just added. For more information, see Testing the POST and GET Operations.
- 16. Expand the Books and Events headers, and test the operations as follows.

#### Result

In the Swagger UI, click **Books** or **Events** to view the following operations for the Books and Events headers:

#### **Books**

- POST books
- GET books
- GET book by ISBN
- PUT book by ISBN
- DELETE book by ISBN

### **Events**

POST Events

- GET Events
- GET Event by EventID
- PUT Event by EventID
- DELETE Event by EventID

**GET books** returns the following similar output:

```
{
  "Book": [
    {
      "isbn": "0061122416",
      "name": "The Alchemist",
      "description": "Every few decades a book is published that changes
the lives of its readers forever. The Alchemist is such a book",
      "authorName": "Paul Coelho",
      "releaseDate": "2006-04-25",
      "vintage": true,
      "signed": true,
      "price": 11.9
    },
      "isbn": "0071450149",
      "name": "The Power to Predict",
      "description": "How Real Time Businesses Anticipate Customer
Needs, Create Opportunities, and Beat the Competition",
      "authorName": "Vivek Ranadive",
      "releaseDate": "2006-01-26",
      "vintage": false,
      "signed": true,
      "price": 15.999
    }
]
}
```

**GET books** by ISBN returns the following similar output for ISBN 0061122416:


```
"isbn": "0061122416",
    "name": "The Alchemist",
    "description": "Every few decades a book is published that changes
the lives of its readers forever. The Alchemist is such a book",
    "authorName": "Paul Coelho",
    "releaseDate": "2006-04-25",
```

```
"vintage": true,
"signed": true,
"price": 11.9
}
```

# Troubleshooting

Your may encounter some errors while executing or running the process. The following are some of the possible errors you may encounter and their resolutions.

Error Encountered	Resolution
Unable to insert rows into the database using the dbsetup.sql script in the scripts folder.	Use the sample JSON payload from the sample json folder to post the data.
The REST Swagger UI page is not visible.	Verify that the application has started and that you are accessing the correct URL. Use the lrestdoc command in the <b>Console view</b> to get the Swagger UI URL.
Problem markers are visible in the project.	Clean the project by invoking <b>Project &gt; Clean</b> or by switching to a clean new workspace.
Getting the File was not found exception.	Ensure that the books.json and book_put.json files are present at the location described in the Input_File and Input_File_1 module properties.
The PostgreSQL server does not start.	Make sure you are not running as Administrator.
The database and database tables are not created.	Open the readme.txt file for the sample, located in the BW_HOME\samples\binding\rest\BookStore\scripts folder. Run the dbsetup.sql script from a command line, not the <b>psql</b> window.
Getting an unregistered user error message while running the process.	Select all the check boxes in the <b>Role Privileges</b> tab in the pgAdmin UI and run the process again. See the image below.

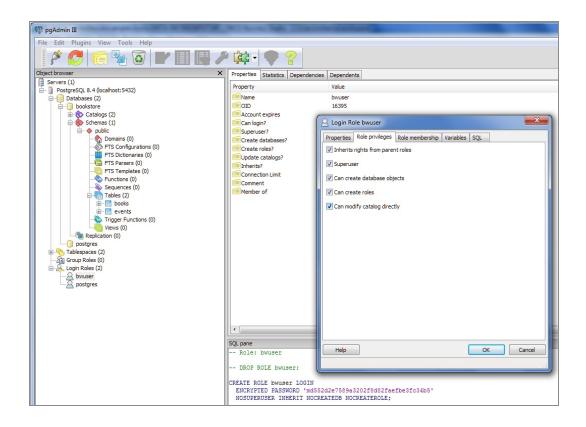

### **REST Reference Tutorial**

The REST reference tutorial shows you how to create a simple REST Invoke to an existing REST Service defined by a Swagger specification.

You cannot convert REST reference to SOAP or vice versa.

#### **Before You Begin**

The REST service which you want to invoke must be accessible from the reference process at the time of its invocation.

#### **Creating a New Application**

- 1. Open TIBCO Business Studio for BusinessWorks.
- 2. Open the **Design** perspective by clicking the **Design** icon in the upper right corner.
- Click File > New > Other > BusinessWorks > BusinessWorks Application Module and click Next.
- 4. Enter tibco.bw.sample.binding.rest in the **Project Name** text box. Do not change the remaining default settings.
- 5. Click **Finish**. This step creates a new application module with an empty process.
- 6. Obtain the Swagger file from the Swagger UI of the running service.
- 7. Copy and paste the content into a new file, and call it Books.json.

#### Importing the JSON File into your Project


- 1. In the **Project Explorer**, expand tibco.bw.sample.binding.rest application module.
- Right-click Service Descriptors and select Import > Import... > General > File
   System and click Next.
- 3. In the File system dialog box, click the **Browse** button and browse to the location of the Books.json file.
- 4. Select the check box next to **Books.json** in the left pane and click **Finish**.

#### **Creating the REST Reference**

- In the Project Explorer, completely expand the tibco.bw.sample.binding.rest folder under Service Descriptors.
- 2. Select the /books under Books.json and drag and drop it to the right side of the process in the Process Editor. The references are added to the process. The purple chevron indicates the service and its operations.
- In the Process Editor, right-click Add Activity > General Activities > Timer.
   Optionally, you can configure the Sleep activity with IntervalInMillisec as 3000 in a similar manner and connect the Timer with Sleep.
- 4. Drag the **get** operation under the purple chevron and drop it on the right of **Timer** activity (or **Sleep** if configured) and connect the **Timer** activity with the **get** activity.
- 5. Drag the **post** operation under the purple chevron and drop it on the right of the **get** activity, connect the **get** activity with the **post** activity.
- 6. Right-click the **get** activity select **Show Properties View**.
- 7. In the **Properties** view, select the **Input** tab and click **Show Check and Repair** icon in the icon bar on the upper right corner of the **Properties** view.
- 8. Select the check box under **Fix** and click **OK**.
- 9. Click Show Check and Repair icon again.
- 10. Select the check box under Fix and click OK.
- 11. Select the **post** activity and right-click and select **Show Properties View**. In the **Properties View**, select the **Input** tab and select **Data Source** tab.
- 12. Expand **\$get** in the **Data Source** tab completely.
- 13. In the XPath Expression pane, expand the **post-input** completely.
- 14. Drag and drop **Book\*** from the **Data Source** tab to the **Book\*** under post-input in the **XPath Expression** pane.
- 15. In the Drop dialog, select **Make a copy of each "book"** radio button and click **Finish**.
- 16. Click **Show Check and Repair** icon in the icon bar on the upper right corner of the Properties view.
- 17. Select the check box under **Fix** and click **OK**.

- 18. Click **Show Check and Repair** icon again. Select the check box under **Fix** and click **OK**.
- 19. In the Project Explorer, select Books.json under Service Descriptors of tibco.bw.sample.binding.rest.basic application module, and right-click Open With > Text Editor and locate the "host" attribute. Make a note of the host name and port number.

- 20. Expand the Resources folder under the **tibco.bw.sample.binding.rest.basic** application module.
- 21. Double-click HttpClientResource.httpClientResource.
- 22. In the **HTTP Client** section, change the Default Host and Default Port to the values in the Books.json file and select the **Default Confidentiality** check box.

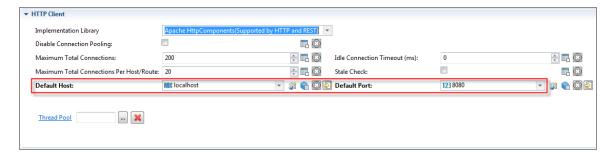


23. Click File > Save All.

#### **Testing the REST Reference**

You can now test the REST service using the built-in tester and the Swagger UI. To do so follow these steps:

- 1. Click Run > Debug Configuration.
- 2. In the left pane of the **Debug Configuration** wizard, expand **BusinessWorks Application** and select **BWApplication**.
- 3. Click the **Applications** tab, then click **Deselect All** if you have multiple applications.
- 4. Select the check boxes next to **tibco.bw.sample.binding.rest.basic.application** and **tibco.bw.sample.binding.restapp**.
- 5. Click **Debug**. This runs the sample in debug mode. The Console view is opened and shows engine messages similar to: Started BW Application [ tibco.bw.sample.binding.rest.Basic.application:1.0]
- 6. In the **Debug** view, expand **BWApplication** [BusinessWorks Application] > <launched> BWEclipseAppNode > tibco.bw.sample.binding.rest.Process and select get.
- 7. In the **JobData** view, you can see the job data of the **get** activity.

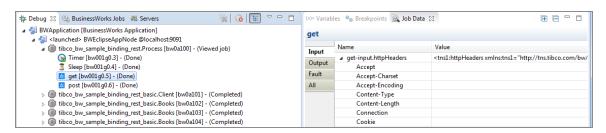

The administration framework supports application deployment either through the bwadmin command line utility or the Admin UI. The scripts provided can be used to set up runtime entities that are useful for testing purposes. This tutorial walks you through running scripts and navigating runtime entities in the Admin UI.

The administration framework contains:

- The Admin UI hosted on TIBCO® Enterprise Administrator
- A powerful back-end bwagent designed to scale across large numbers of actual or virtual machines to manage large scale deployment.
- A simple, flexible, and easy-to-use bwadmin command line utility.

This section shows how to:

- Create runtime entities (Domains, AppSpaces, and AppNodes) and upload and deploy archive files using scripts.
- Start and stop applications using the Admin UI.
- Navigate runtime entities using the Admin UI.

For more information on runtime entities, see Administration Concepts in the TIBCO Active Matrix Business Works™ Concepts guide.

For more information on the commands used in this sample, see Getting Started in the *TIBCO ActiveMatrix BusinessWorks™ Administration* guide.

# Running Admin Sample Scripts


This tutorial walks you through running the Bookstore and Acme administration scripts.

#### **Before You Begin**


If you want to run scripts, the installation directory cannot contain one or more spaces. For example, on Windows, TIBCO ActiveMatrix BusinessWorks™ should not be installed in the Program Files folder.

- 1. Optional. Install Enterprise Message Service™ 8.x or higher if you want to run the Acme.com applications.
- 2. Optional. Install PostgreSQL 9.3.x if you want to run the Bookstore sample.
  - For more information, see Installing PostgreSQL.
- 3. On Windows, you must install the latest Cygwin 64-bit version from <a href="http://www.cygwin.com/">http://www.cygwin.com/</a>. Scripts must be executed with Cygwin. Install the **Utils** and **Net** package which contains the diff.exe and ssh.exe executables.
  - Select the Utils and Net packages and change the option from Default to Install. Refer to the following images that show the Utils and Net packages.

#### **Utils Package**

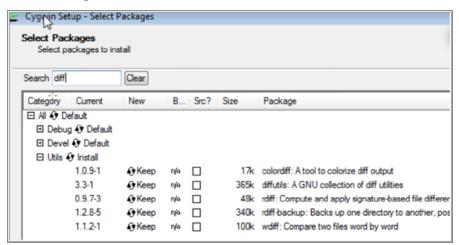

#### Net Package

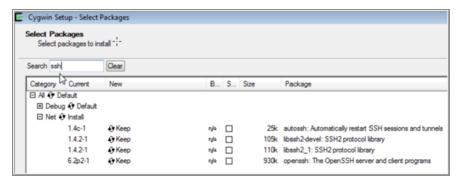

#### **Procedure**

1. Install ActiveMatrix BusinessWorks™ . For example,

- a. On Unix, install ActiveMatrix BusinessWorks into /opt/tibco/bw-6.x as *TIBCO\_HOME*.
- b. On Windows, install ActiveMatrix BusinessWorks into /opt/tibco/bw-6.x as *TIBCO\_HOME*.

From here onwards, the following instructions use the directory path mentioned above to refer to certain installed files. Replace this path with the install directory of your choice.



Important: Important: On Windows OS, avoid installing ActiveMatrix BusinessWorks in a directory with space. The product binary supports it, however, the scripts in \${BW\_HOME}/scripts/admin and \${BW\_HOME}/samples/core/admin are bash scripts and work best with directory paths without space.

- 2. Install TIBCO Enterprise Administrator 2.0 or compatible version, in the same *TIBCO\_HOME*. When TIBCO Enterprise Administrator installer prompts for *JAVA\_HOME* path, point to /opt/tibco/bw-6.x/tibcojre64/1.7.0 on UNIX. On Windows, point to c:/tibco/bw-6.x/tibcojre64/1.7.0.
  - You can install TIBCO Enterprise Administrator in a separate *TIBCO\_HOME*. If you choose to do that, refer to Step 4.
- 3. Install TIBCO Enterprise Message Service 8.1, or compatible version, in the same *TIBCO\_HOME*. You can install TIBCO Enterprise Message Service in a separate *TIBCO\_HOME*. If you have installed TIBCO Enterprise Message Service in a separate *TIBCO\_HOME*, refer to Step 4.
- 4. On UNIX: If you have installed TIBCO Enterprise Administrator and/or TIBCO Enterprise Message Service in a separate <TIBCO\_HOME> than ActiveMatrix BusinessWorks, open /opt/tibco/bw-6.x/bw/6.x/scripts/bashrc.sh in a text editor and adjust TEA\_HOME and EMS\_HOME to point to where you have installed them.
- 5. This step is applicable only to Windows OS. From a proper text editor (Do not use Notepad.exe), open and edit c:/tibco/bw-6.x/bw/6.x/scripts/bashrc.sh. Search and replace all occurrences of C:/ (or whatever letter drive you have installed ActiveMatrix BusinessWorks) with /cygdrive/c/ (or /cygdrive/<drive-letter-where-you-installed-bw6>).
  - Adjust *TEA\_HOME* and *EMS\_HOME* to point to the location, where you have installed them.

- 6. Source the bashrc.sh script from your ~/.bashrc or ~/.profile files.
  - On UNIX: Locate your ~/.bashrc or ~/.profile file and add the following line at the end:

```
source /opt/tibco/bw-6.x/bw/6.x/scripts/bashrc.sh
```

• On Windows: Edit the .bashrc file located at CYGWIN\_HOME/home/<UserName> to add the following line at the end:

```
source c:/tibco/bw-6.x/bw/6.x/scripts/bashrc.sh
```

7. To verify that the environment variables are configured correctly, open a new command line window, navigate to <TIBCO\_HOME>/bw/6.x/scripts/admin/, and run ./bw6env.sh. This script prints the required and optional environment variable configurations on the screen.



**Note:** Note: The script returns the environment variable configurations only if the environment variables are set correctly.

The following is a sample output on UNIX:

```
Admin@WINAA-2:admin admin$ ./bw6env.sh
BW 6 Environment Configurations
Required Environment Variables:
 TIBCO_HOME = /opt/tibco/bw-6.x
  BW_HOME = /opt/tibco/bw-6.x/bw/6.x
  JAVA_HOME = /opt/tibco/bw-6.x/tibcojre64/1.7.0
Optional Environment Variables:
 TEA_HOME = /opt/tibco/bw-6.x/tea/2.1
 EMS_HOME = /opt/tibco/bw-6.x/ems/8.1
Required Binaries on $PATH:
Optional Binaries on $PATH:
```

- 8. Change to the admin folder by typing: admin
- 9. Issue the following command to create the BookStore sample, create the domains for

the Acme sample, create the Samples-Domain, and deploy all sample archive files: runAll.sh



#### **Note: Note:**

- Running the runAll.sh script automatically updates the Admin "local" mode to "enterprise" mode.
- You can use -clean option which cleans TIBCO Enterprise Administrator Server Data Store and ActiveMatrix BusinessWorks™ Domain Data Store.
- This script may take up to 10 or 15 minutes to complete. To see how long it takes to run the sample, run the time runAll.sh command to measure the time the script takes to complete.
- If you don't want to run all the samples at the same time, then run the following commands:
  - a. bootstrap.sh -clean



▲ Caution: Caution: Running the bootstrap.sh clean with the -clean option cleans the TIBCO Enterprise Administrator server and the ActiveMatrix BusinessWorks<sup>™</sup> domain datastore. Use the -clean option only if you want to clear the TIBCO Enterprise Administrator server and ActiveMatrix BusinessWorks<sup>™</sup> domain datastore.


- b. runBookStore.sh to run REST BookStore sample, or
- c. runSamples.sh to run other samples
- 10. Open a web browser and access the Admin UI at http://localhost:8777/tea
- 11. Log in using:

Username: admin Password:admin

12. Click **BusinessWorks** in the **Products** list to see the following domains in the **Domain** Management screen.

- · Acme-QA-Domain
- Acme-UAT-Domain
- BookStore-Domain
- Samples-Domain

Drill down into any of the domains to see the created runtime entities, such as AppSpaces, AppNodes, application archives, and applications.

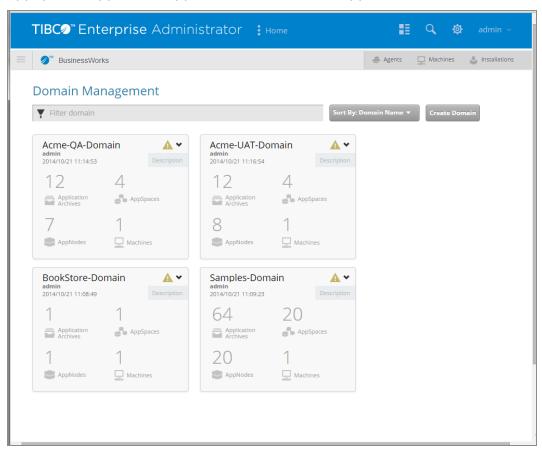


# Testing the Deployed RESTful BookStore Application from Admin UI

The runAll script creates four domains, with multiple AppSpaces and AppNodes. The instructions in this topic show how to navigate the Admin UI to view the runtime entities.


#### **Procedure**

- - 1. In the TIBCO® Enterprise Administrator browser window, click **TIBCO Enterprise Administrator** at the top of the page to open the home page.
  - 2. Click the BusinessWorks icon in the Products list to display the Domains page. The **Domains Management** page displays.

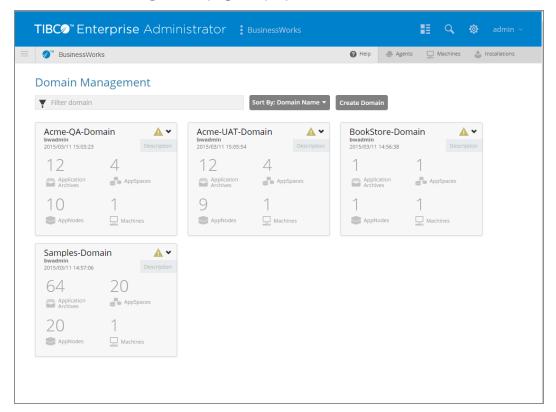

3. Click BookStore-Domain to drill down into domain details, then click Monitor to see the dashboard.

4. Click an entity in the side bar, such as **AppNodes**, to pivot views.

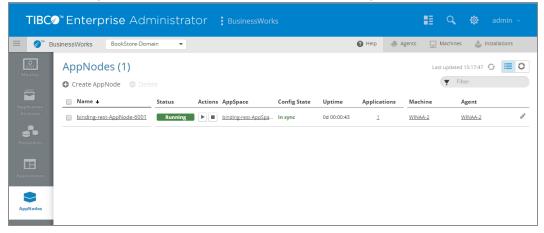


To view the BookStore application deployed earlier, select **Applications** on the left.
 A single application archive is displayed.




6. Go to **Applications** to view the deployed applications



7. In the Applications view, click the link for **REST Doc URL**.

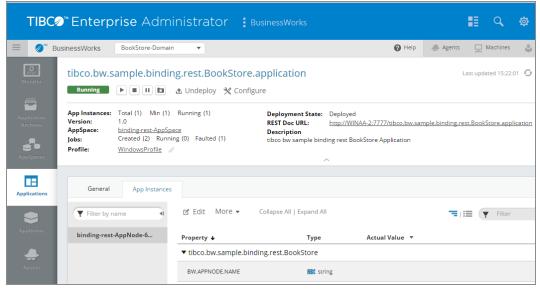

8. Test the deployed application in the Google Chrome browser using Swagger UI. Open localhost:7777/tibco.bw.sample.binding.rest.BookStore.application.

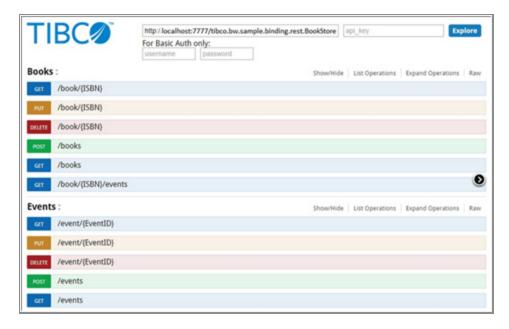

9. To execute the REST operations exposed by the BookStore application, click the GET/books icon and then click Try it Out!.

This displays a list of all books. Locate and copy an ISBN.

- 10. Click the **GET/books{ISBN**} icon to get a book by its ISBN.
- 11. Enter the ISBN and then click **Try it Out!**.

The book details can be seen in the Response Body.


# Defining and Deploying Multiple AppSpaces and **AppNodes**

The runAll script defines multiple AppSpaces and AppNodes and deploys multiple applications to these AppNodes. This topic shows how to navigate the Admin UI to locate these runtime entities.


#### **Procedure**

- 1. Navigate to the **Domain Management** page by clicking the **TIBCO Enterprise Administrator** icon and choosing **BusinessWorks** in the **Products** area.
- 2. Choose the **Acme-QA-Domain** to see the **Monitor** page that shows the status of AppSpaces, AppNodes, and applications.


3. Click **AppSpaces** in the side bar to display the **AppSpaces** page. (You can also click the **AppSpace** icon on the **Monitor** page.) Change the view of the page by clicking the icons in the upper right of the screen.

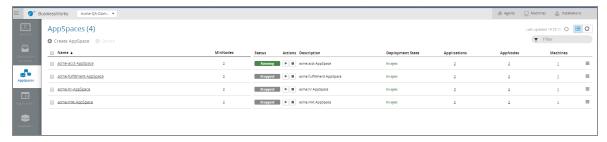

4. Now, view the AppNodes. Click **AppNodes** in the side bar.

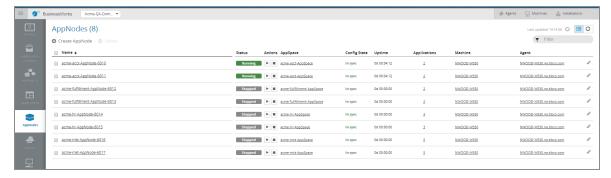

5. View the application archives by clicking **Application Archives** in the side bar.

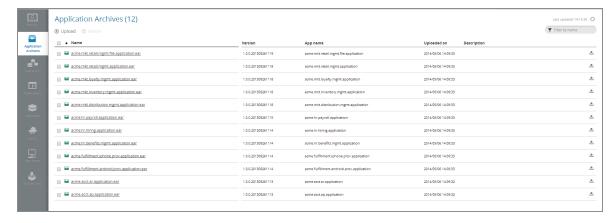

- 6. Execute the killall.sh command to shut down all running components.
- 7. Execute the bwclean.sh command to clean up.

## Core Admin Sample Scripts

The sample scripts provide a simple and fast way to run the core Admin samples.

These are bash scripts. On Windows, install Cygwin64.

Admin scripts are located in the following folders: \$BW\_HOME/samples/core/admin and \$BW\_HOME/scripts/admin

For information about running the sample scripts, see the "Running Admin Sample Scripts" section in the TIBCO ActiveMatrix BusinessWorks™ Getting Started guide.

This sets the *TIBCO\_HOME*, *BW\_HOME*, *TEA\_HOME*, *EMS\_HOME*, and *JAVA\_HOME* environment variables necessary to run the admin scripts.

All scripts support the -h and command-line argument with full documentation of what each script does.

#### **Location of the Admin Scripts**

The admin scripts are located in the following folders:

- The sample scripts are located in \$BW\_HOME/samples/core/admin
- The scripts that are generic for Activematrix BusinessWorks™ are located in \$BW\_HOME/scripts/admin

The scripts are updated to rely on the PATH setting to find the generic scripts. To make this easier to configure, after installation you can generate \$BW\_HOME/scripts/bashrc.sh that can be sourced from your ~/.bashrc.

Source the \$BW\_HOME/scripts/bashrc.sh to setup the following environment variables required to run the scripts mentioned in the table below:

Variable	Required
TIBCO_HOME	Yes
BW_HOME	Yes
TEA_HOME	No. But required if you run TIBCO® Enterprise Administrator on this machine.
EMS_HOME	No. But required if Enterprise Message Service™ is configured on this machine.
PATH	This variable is auto-populated based on the values set for the above variables.

#### **Core Admin Scripts**

The following table lists some of the available scripts; browse the folder to see the complete list.

#### Core Admin Scripts

Script	Description	Script Location
AppManage.sh	This is a ActiveMatrix BusinessWorks™ 6.x utility program that emulates ActiveMatrix BusinessWorks™ 5.x AppManage commands.	\$BW_HOME /samples/core/adm in
	The main purpose of this utility is to demonstrate how the AppManage commands from ActiveMatrix BusinessWorks™ 5.x translate to corresponding TIBCO ActiveMatrix BusinessWorks 6.x bwadmin commands.	
	This utility creates a cmd/AppManage_ deploy.cmd folder that contains bwadmin commands and uses bwadmin -f cmd/AppManage_deploy.cmd to run it.	
	<b>Note:</b> Not all AppManage commands are implemented in this emulation utility.	
	ActiveMatrix BusinessWorks™ Augmented Options:	
	<ul> <li>-appSpace or - a - AppSpace name to be used for Application lifecycle.</li> </ul>	
	<ul> <li>-profile or -p - Configuration         Profile to use for deployment. This         profile must be available in the EAR         file.     </li> </ul>	
	<ul> <li>-profileFile- Configuration Profile file to use for deployment.</li> </ul>	

Script	Description	Script Location
	<ul> <li>-debug - Turn on debug tracing for this utility.</li> </ul>	
	<ul> <li>-sapp - Single Application per AppSpace deployment mode. Each AppSpace supports only one application deployment.</li> </ul>	
	<ul> <li>-mapp - Multiple Applications per AppSpace deployment mode. Each AppSpace supports one or more application deployments.</li> </ul>	
	<b>Note:</b> ActiveMatrix BusinessWorks™ supports both -sapp and -mapp modes. The default is -mapp mode.	
bootstrap.sh	Usage: bootstrap.sh [-h -help] [-clean] [-forceClean -force -forceclean]	\$BW_ HOME /scripts/admin
	This utility is a wrapper script around the following scripts:	
	• killtea.sh	
	• killbwagent.sh	
	<ul> <li>teaclean.sh only if -clean or - forceClean options is used.</li> </ul>	
	<ul> <li>bwclean.sh if and only if -clean or -forceClean options is used.</li> </ul>	
	• genbwagentini.sh	
	• tea.sh	
	• bwagent.sh	
	• registeragent.sh	
	<pre>[-h] or [-help] - Prints this usage message.</pre>	

Script	Description	Script Location
	-clean Cleans TIBCO Enterprise Administrator Server Data Store and ActiveMatrix BusinessWorks™ Domain Data Store.	
	<b>Note:</b> The -clean command on the data store is not reversible, so back up your data stores before using the command. Use this option carefully, as you may lose all your configurations if you do not have a backup.	
	-forceClean Same as -clean, except it avoids prompting user to confirm with clean.	
	-force Same as -forceClean	
	-forceclean Same as -forceClean	
	This script assumes that the following products are installed correctly and the environment variables are set accordingly:	
	TIBCO_HOME = TIBCO_HOME directory where you installed ActiveMatrix Businessworks™.	
	TEA_HOME = Parent directory to TIBCO Enterprise Administrator's /bin directory.	
	Supports generation of bwagent.ini file for either Database/ TIBCO EMS™, or Database/ TIBCO FTL® as the technology type.	
bounce.sh	This utility does the following:  1. Stops TIBCO Enterprise    Administrator Server and bwagent    Processes.	\$BW_ HOME /scripts/admin
	110003303.	

Script	Description	Script Location
	<ol> <li>Restarts TIBCO Enterprise         Administrator Server and bwagent         Processes.     </li> </ol>	
	<ol><li>Registers bwagent to TIBCO Enterprise Administrator Server.</li></ol>	
	<pre>[-h] or [-help] - Prints this help message and exits.</pre>	
bounceagent.sh	Kills and restarts bwagent Process.	\$BW_ HOME
	[-h] or [-help] - Prints this help message and exits.	/scripts/admin
bwadmin.sh	This is a utility script that wraps around the bwadmin executable.	\$BW_ HOME /scripts/admin
	<pre>[-h] or [-help] - Prints this help message and exits.</pre>	, 55. 14 55, 55
	[-network <bwagent name="" network="">] - Connects to a named bwagent Network. This is an optional argument.</bwagent>	
	By default, this script uses \$BW_ HOME/config/bwagent.ini	
	[ <bwadminargs>] - Use bwadmin to run commands found in the input files.</bwadminargs>	
	Start bwadmin in the interactive mode if cmdFile is not specified.	
	A bwagent Network Name is a named directory under \${TIBCO_ HOME}/bw/networks and contains the corresponding bwagent.ini.	
	How to Set Up a Newly Named Network	
	1. Obtain a bwagent.ini created for	

Script	Description	Script Location
	the named bwagent network. For example, a named network called "acmeNetwork"	
	<ol> <li>Create the acmeNetwork directory under \${TIBCO_HOME}/bw/networks.</li> <li>For example, mkdir \${TIBCO_ HOME}/bw/networks/acmeNetwork</li> </ol>	
	<ol><li>Copy bwagent.ini to the above directory.</li></ol>	
	<ol><li>Rerun bwadmin.sh -network acmeNetwork</li></ol>	
bwagent.sh	This script starts bwagent in the background and waits until it is fully initialized, or the maxWait time ( <n> * 2 sec) expires.</n>	\$BW_ HOME /scripts/admin
	<pre>[-h] or [-help] - Prints this usage message.</pre>	
	[-network <network>] - Starts up bwagent using the configuration of a named network.</network>	
	[-maxWait <n>] - Maximum amount of wait time (2 sec increment) for bwagent start up success.</n>	
	The dDefault value for <n> is 30, which means 30 * 2 sec = 60 seconds</n>	
bwclean.sh	This utility script cleans up ActiveMatrix BusinessWorks™ Domain Data and internal Data Store. The end effect of this clean up is similar to a fresh installation of ActiveMatrix BusinessWorks™.	\$BW_ HOME /scripts/admin
	[-force] or [-forceClean] - Proceeds	

Script	Description	Script Location
	with wiping ActiveMatrix BusinessWorks™ Domain Data and internal Data Store without prompting user reconfirmation.	
	By default, the script prompts user confirmation.	
configureBWEngineGroup .sh	This utility configures AppNodes in a Domain/AppSpace to form a fault-tolerant group and cross engine persistence	\$BW_ HOME /scripts/admin
	<pre>[-h] or [-help] - Prints this usage message.</pre>	
	<pre>[-c] or [-clean] - Cleans up and drops all the previously configured database tables.</pre>	
	Use this option carefully. This operation cannot be undone. Do not specify both – setup and –cleanup on the same run.	
	[-s] or [-setup] - Does the one time setup of bwengine Database. When this option is used, -domain and -appspace arguments are not needed and are not used even if specified. \${BW_HOME}/config/sqlscripts/ <dbtype>/cre ate.sql is used to set up the database tables and configuration.</dbtype>	
	<pre>[-b] or [-bootstrap] - Does clean up then setup.</pre>	
	<pre>[-t] or [-dbtype] - This is the default value is postgresql.</pre>	
	<pre>-cf <config.sh> - Sources configuration from the specified <config.sh> file.</config.sh></config.sh></pre>	
	By default, <\$BW_ HOME>/scripts/admin/config/bwengine-	

Script	Description	Script Location
	group- <dbtype>.sh</dbtype>	
	<pre>[-d] or [-domain] - Domain Name</pre>	
	[-a] or [-appspace <appspace>] - AppSpace Name. All AppNodes in the specified Domain and AppSpace are configured to form a Fault-Tolerant group and across engine persistence.</appspace>	
deploy.sh	Usage: deploy.sh -ear <earfile> [-h -help] [-domain <domainname>] [-appspace <appspacename>] [-redeploy -force] [-profile <profile>]</profile></appspacename></domainname></earfile>	\$BW_ HOME /scripts/admin
	Deploys the specified ActiveMatrix BusinessWorks™ EAR File into -domain <domainname> -appspace <appspacename></appspacename></domainname>	
	[-h] or [-help]- Prints this help message.	
	<pre>-ear <earfile> - Enterprise Archive file to deploy</earfile></pre>	
	[-domain <domainname>] - Domain Name - Optional parameter</domainname>	
	If it is not specified, DomainName is computed from \${USER}-Domain	
	This utility creates the Domain if it does not already exist.	
	<pre>[-appspace <appspacename>] - AppSpace Name - Optional parameter</appspacename></pre>	
	If it is not specified, AppSpaceName is computed from the name of the EAR file.	
	This utility creates the AppSpace and AppNode if they do not already exist.	

Script	Description	Script Location
	<pre>[-redeploy -force] - Redeploy if the application has been previously deployed.</pre>	
	The application is not redeployed if it already exists and this option is not specified.	
	[-profile <profile>] : Profile name to use for this deployment.</profile>	
	If it is not specified, the default Profile as packaged in the Enterprise Archive file is used.	
	[-mapp] - Optional flag to set Multiple Applications per AppSpace Mode. This is the default mode for ActiveMatrix BusinessWorks™.	
	<pre>[-debug] - Prints debug tracing for this script ./deploy.sh</pre>	
genbwagentini.sh	This script auto generates \${BW_ HOME}/config/bwagent.ini based on configurations defined in ./config/bwadmin-default- config.sh	\$BW_ HOME /scripts/admin
	-h or -help - Prints this help message.	
	The following variables are required from ./config/bwadmin-default- config.sh:	
	<ul> <li>BWAgentNetworkName - Name of BWAgent Network.</li> </ul>	
	<ul> <li>BWMachines - Defined as a list of machine names (as obtained through hostname -f). If you have only one machine to configure, do not add it to this list because this script auto-configures it as a</li> </ul>	

Script	Description	Script Location
	standalone BWAgent Network.	
	This script uses hostname —f to determine the name of the machine it is run on. It then determines whether this machine is in the BWMachines list.	
	You can assume that the discoveryURL of the bwagent.ini is comparable to that of a Database Server's URL, and BWAgentNetworkName is then comparable to the Database Name. You can configure both to uniquely access the specific instance of the Database.	
	If the KEEP_BWAGENT_INI environment variable is defined, bwagent.ini generation is skipped.	
	You can edit either the ./config/bwadmin-default- config.sh file, or make a copy of it, edit it, and then set environment variable BWADMIN_CONFIG to point to it. For example, export BWADMIN_CONFIG=~/config/bwadmin-my-config.sh	
	Generates bwagent.ini file for either Database/EMS, or Database/ TIBCO FTL® as the technology type.	
kill.sh	Kills all processes that match the specified <pre><pre><pre><pre><pre>-h or -help - Prints this help message.</pre></pre></pre></pre></pre>	\$BW_ HOME /scripts/admin
	<pre><pre><pre><pre><pre><pre><pre>process name</pre> - name of the process you want to kill. This script kills all instances of the pid that matches this name.</pre></pre></pre></pre></pre></pre>	
killall.sh	This script finds and kills all instances of	\$ <i>BW</i> _

Script	Description	Script Location
	processes that match the following names:	HOME /scripts/admin
	• tea	/ SCI TPCS/ admitti
	<ul><li>bwagent</li></ul>	
	<ul> <li>bwappnode</li> </ul>	
	<ul><li>bwadmin</li></ul>	
	-h or -help - Prints this help message.	
killbwagent.sh	This script finds and kills all instances of processes that match "bwagent".	\$BW_ HOME /scripts/admin
	-h or -help - Prints this help message.	, ,
killbwappnodes.sh	This script finds and kills all instances of processes that match "bwappnode".	\$BW_ HOME /scripts/admin
	-h or -help - Prints this help message.	/ SCI TPCS/ admitti
killtea.sh	This script finds and kills all instance of processes that matches "tea".	\$BW_ HOME
	·	/scripts/admin
	-h or -help - Prints this help message.	
killtibemsd64.sh	This script finds and kills all instances of processes that match "tibemsd".	\$BW_ HOME /scripts/admin
	-h or -help - Prints this help message.	/ SCI TPCS/ admitti
recreatedb.sh	This script cleans up and recreates the Postgres DB needed by ActiveMatrix BusinessWorks™ BookStore REST sample located in: \${BW_ HOME}/samples/binding/rest/BookStore	\$BW_HOME /samples/core/adm in
	-h and -help - Prints this help message.	
registeragent.sh	This utility registers the local bwagent with TIBCO Enterprise Administrator	\$BW_ HOME /scripts/admin

Script	Description	Script Location
	server.	
	-h or -help - Prints this help message.	
	This utility assumes that the following environment variables have been set:	
	export TIBCO_HOME=" <where activematrix<br="">BusinessWorks™ is installed&gt;"</where>	
	At least one of the following environment variable is set:	
	export TEA_HOME="Where TIBCO Enterprise Administrator is installed in the form of \$TIBCO_HOME/tea/ <version>"</version>	
	Or,	
	export TEA_HOSTNAME= <hostname></hostname>	
	If TEA_HOSTNAME environment variable is set, it assumes the TIBCO Enterprise Administrator server is running remotely from the local bwagent instance.	
	If TEA_HOSTNAME environment variable is not set, this script registers the local bwagent to the locally running TIBCO Enterprise Administrator server.	
runAcme.sh	Creates <domain> and deploys all EAR files found under \${BW_ HOME}/samples/core/admin/ears/acme.  -h or -help: Displays this usage message</domain>	\$BW_HOME /samples/core/adm in
	<pre><domain> - can be "Acme-QA-Domain" or "Acme-UAT-Domain". When not specified, the default is "Acme-QA-Domain" <mode> - [-sapp ] or [-mapp]</mode></domain></pre>	
	ore, [ gabb ] or [ mabb]	

Script	Description	Script Location
	-sapp- Single App AppSpace deployment mode. Each AppSpace supports only one application deploymentmapp - Multiple App AppSpace deployment mode. Each AppSpace supports one or more application deployment.	
	<b>Note:</b> ActiveMatrix BusinessWorks <sup>™</sup> supports both -sapp and -mapp modes. The default is -mapp mode.	
	This script dynamically creates a bwadmin command file in cmd/ <domain>- <mode>.cmd and executes it.</mode></domain>	
runAll.sh	This utility is a wrapper script that performs the following:	\$BW_HOME /samples/core/adm in
	<ul> <li>bootstrap.sh - only if running in a single machine setup</li> </ul>	
	<ul> <li>runBookStore.sh</li> </ul>	
	<ul><li>runSamples.sh</li></ul>	
	<ul> <li>runAcme.sh -domain Acme-QA- Domain</li> </ul>	
	<ul> <li>runAcme.sh -domain Acme-UAT- Domain</li> </ul>	
	<ul><li>-h or -help - Displays this usage message and exits</li></ul>	
	-clean - Cleans the TIBCO Enterprise Administrator Server Data Store and ActiveMatrix BusinessWorks™ Domain Data Store.	
	These data store clean is not reversible. Make sure you back up your data stores	

Script	Description	Script Location
	before running this command. Use this option with utmost care, otherwise you risk losing all your configurations.	
	<pre>-forceClean - Same as -clean, except it avoids prompting you to confirm with clean.</pre>	
	-force - Same as -forceClean	
	<mode> - [-sapp   -mapp]</mode>	
	<ul> <li>-sapp - Single Application per AppSpace deployment mode. Each AppSpace supports only one application deployment.</li> </ul>	
	<ul> <li>-mapp - Multiple Applications per</li> <li>AppSpace deployment mode. Each</li> <li>AppSpace supports one or more</li> <li>application deployments.</li> </ul>	
	<b>Note:</b> ActiveMatrix BusinessWorks <sup>™</sup> supports both -sapp and -mapp modes. The default is -mapp mode.	
	Generates the bwagent.ini file for either Database/EMS™, or Database/FTL® technology type.	
runBookStore.sh	Creates BookStore-Domain and deploys all EAR files found under \${BW_ HOME}/samples/core/admin/ears/bookstore	\$BW_HOME /samples/core/adm in
	-h or -help - Displays this usage message.	
	<mode> - [-sapp   -mapp]</mode>	
	-sapp - Single Application per AppSpace	

Script	Description	Script Location
	deployment mode. Each AppSpace supports only one application deployment.	
	<ul> <li>-mapp - Multiple Application per</li> <li>AppSpace deployment mode. Each</li> <li>AppSpace supports one or more</li> <li>application deployments.</li> </ul>	
	<b>Note:</b> ActiveMatrix BusinessWorks <sup>™</sup> supports both -sapp and -mapp modes. The default is -mapp mode.	
	This script dynamically creates a bwadmin cmd file in cmd/Samples-Domain- <mode>.cmd and executes it.</mode>	
runSamples.sh	Creates Samples-Domain and deploys all EAR files found under \${BW_ HOME}/samples/core/admin/ears/samples	\$BW_HOME /samples/core/adm in
	-h or -help - Displays this usage message.	
	<mode>: [-sapp] or [-mapp]</mode>	
	<ul> <li>-sapp: Single Application per AppSpace deployment mode. Each AppSpace supports only one application deployment.</li> </ul>	
	-mapp: Multiple Application per AppSpace deployment mode. Each AppSpace supports one or more application deployments.	

Script	Description	Script Location
	Note: ActiveMatrix BusinessWorks™ supports both -sapp and -mapp modes. The default is -mapp mode. This script dynamically creates a bwadmin command file in cmd/Samples-Domain- <mode>.cmd and executes it.</mode>	
showprocs.sh	Shows process ID and complete binary path of all processes required in ActiveMatrix BusinessWorks™:	\$BW_ HOME /scripts/admin
	• tibemsd	
	• tea	
	• bwagent	
	<ul> <li>bwappnode</li> </ul>	
	• bwadmin	
tea.sh	This script starts TIBCO Enterprise Administrator in the background and waits until it is completely initialized, or the maxWait time ( <n> * 2 sec) expires.</n>	\$BW_ HOME /scripts/admin
	-h or -help - Prints this usage message.	
	[-maxWait <n>] - Max number of wait time (2 sec increment) for TIBCO Enterprise Administrator Server startup success.</n>	
	The default value for <n> is 30, which means 30 * 2 sec = 60 seconds.</n>	
teaclean.sh	This utility script cleans TIBCO Enterprise Administrator Server's configuration data store.	\$BW_ HOME /scripts/admin
	The end effect of this clean up is similar to a fresh installation of TIBCO Enterprise	

Script	Description	Script Location
	Administrator.	
	-h or -help - Prints this usage message	
	-force or -forceClean - Proceeds with wiping ActiveMatrix BusinessWorks™ Domain Data and internal data store without prompting user reconfirmation.	
	By default, the script prompts user confirmation.	
tibemsd64.sh	This script starts tibemsd64 in the background and waits until it is completely initialized, or the maxWait time ( <n> * 2 sec) expires.</n>	\$BW_ HOME /scripts/admin
	-h or -help - Prints this usage message	
	<pre>[-maxWait <n>] - Max number of wait time (2 seconds increment) for tibemsd64 start up success.</n></pre>	
	The default value for $< n >$ is 30, which means 30 * 2 sec = 60 seconds.	
	This script is only supported on UNIX based systems.	
	For Windows, use Windows Systems Services to start or stop tibemsd64.	



Note: Each runAcme.sh, runBookStore.sh, runSamples.sh, deploy.sh, and AppManage.sh generates bwadmin commands before execution.

The generated bwadmin command files are found under cmd subdirectory.

# **TIBCO Documentation and Support Services**

For information about this product, you can read the documentation, contact TIBCO Support, and join TIBCO Community.

#### **How to Access TIBCO Documentation**

Documentation for TIBCO products is available on the TIBCO Product Documentation website, mainly in HTML and PDF formats.

The TIBCO Product Documentation website is updated frequently and is more current than any other documentation included with the product. To access the latest documentation, visit <a href="https://docs.tibco.com">https://docs.tibco.com</a>.

#### **Product-Specific Documentation**

Documentation for TIBCO ActiveMatrix BusinessWorks™ is available on the TIBCO ActiveMatrix BusinessWorks™ Product Documentation page.

To directly access documentation for this product, double-click the following file:

TIBCO\_HOME/release\_notes/TIB\_BW\_6.8.0\_docinfo.html where TIBCO\_HOME is the top-level directory in which TIBCO products are installed. On Windows, the default TIBCO\_HOME is C:\tibco. On UNIX systems, the default TIBCO\_HOME is /opt/tibco.

The following documentation for this product is available on the TIBCO ActiveMatrix BusinessWorks™ page:

The following documents for this product can be found in the TIBCO Documentation site:

- TIBCO ActiveMatrix BusinessWorks™ Release Notes
- TIBCO ActiveMatrix BusinessWorks™ Installation
- TIBCO ActiveMatrix BusinessWorks™ Application Development
- TIBCO ActiveMatrix BusinessWorks<sup>™</sup> Application Monitoring and Troubleshooting
- TIBCO ActiveMatrix BusinessWorks™ Bindings and Palettes Reference
- TIBCO ActiveMatrix BusinessWorks™ Concepts
- TIBCO ActiveMatrix BusinessWorks™ Error Codes
- TIBCO ActiveMatrix BusinessWorks™ Getting Started

- TIBCO ActiveMatrix BusinessWorks™ Migration
- TIBCO ActiveMatrix BusinessWorks™ Performance Benchmarking and Tuning
- TIBCO ActiveMatrix BusinessWorks™ REST Implementation
- TIBCO ActiveMatrix BusinessWorks™ Refactoring Best Practices
- TIBCO ActiveMatrix BusinessWorks™ Samples

#### **How to Contact TIBCO Support**

You can contact TIBCO Support in the following ways:

- For an overview of TIBCO Support, visit http://www.tibco.com/services/support.
- For accessing the Support Knowledge Base and getting personalized content about products you are interested in, visit the TIBCO Support portal at https://support.tibco.com.
- For creating a Support case, you must have a valid maintenance or support contract with TIBCO. You also need a user name and password to log in to <a href="https://support.tibco.com">https://support.tibco.com</a>. If you do not have a user name, you can request one by clicking Register on the website.

#### **How to Join TIBCO Community**

TIBCO Community is the official channel for TIBCO customers, partners, and employee subject matter experts to share and access their collective experience. TIBCO Community offers access to Q&A forums, product wikis, and best practices. It also offers access to extensions, adapters, solution accelerators, and tools that extend and enable customers to gain full value from TIBCO products. In addition, users can submit and vote on feature requests from within the TIBCO Ideas Portal. For a free registration, go to <a href="https://community.tibco.com">https://community.tibco.com</a>.

SOME TIBCO SOFTWARE EMBEDS OR BUNDLES OTHER TIBCO SOFTWARE. USE OF SUCH EMBEDDED OR BUNDLED TIBCO SOFTWARE IS SOLELY TO ENABLE THE FUNCTIONALITY (OR PROVIDE LIMITED ADD-ON FUNCTIONALITY) OF THE LICENSED TIBCO SOFTWARE. THE EMBEDDED OR BUNDLED SOFTWARE IS NOT LICENSED TO BE USED OR ACCESSED BY ANY OTHER TIBCO SOFTWARE OR FOR ANY OTHER PURPOSE.

USE OF TIBCO SOFTWARE AND THIS DOCUMENT IS SUBJECT TO THE TERMS AND CONDITIONS OF A LICENSE AGREEMENT FOUND IN EITHER A SEPARATELY EXECUTED SOFTWARE LICENSE AGREEMENT, OR, IF THERE IS NO SUCH SEPARATE AGREEMENT, THE CLICKWRAP END USER LICENSE AGREEMENT WHICH IS DISPLAYED DURING DOWNLOAD OR INSTALLATION OF THE SOFTWARE (AND WHICH IS DUPLICATED IN THE LICENSE FILE) OR IF THERE IS NO SUCH SOFTWARE LICENSE AGREEMENT OR CLICKWRAP END USER LICENSE AGREEMENT, THE LICENSE(S) LOCATED IN THE "LICENSE" FILE(S) OF THE SOFTWARE. USE OF THIS DOCUMENT IS SUBJECT TO THOSE TERMS AND CONDITIONS, AND YOUR USE HEREOF SHALL CONSTITUTE ACCEPTANCE OF AND AN AGREEMENT TO BE BOUND BY THE SAME.

This document is subject to U.S. and international copyright laws and treaties. No part of this document may be reproduced in any form without the written authorization of TIBCO Software Inc.

TIBCO, the TIBCO logo, the TIBCO O logo, ActiveMatrix BusinessWorks, ActiveSpaces, Business Studio, TIBCO Business Studio, TIBCO Designer, TIBCO Enterprise Administrator, Enterprise Message Service, Hawk, Rendezvous, and TIBCO Runtime Agent are either registered trademarks or trademarks of TIBCO Software Inc. in the United States and/or other countries.

Java and all Java based trademarks and logos are trademarks or registered trademarks of Oracle and/or its affiliates.

This document includes fonts that are licensed under the SIL Open Font License, Version 1.1, which is available at: https://scripts.sil.org/OFL

Copyright (c) Paul D. Hunt, with Reserved Font Name Source Sans Pro and Source Code Pro.

All other product and company names and marks mentioned in this document are the property of their respective owners and are mentioned for identification purposes only.

This software may be available on multiple operating systems. However, not all operating system platforms for a specific software version are released at the same time. See the readme file for the availability of this software version on a specific operating system platform.

THIS DOCUMENT IS PROVIDED "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, OR NON-INFRINGEMENT.

THIS DOCUMENT COULD INCLUDE TECHNICAL INACCURACIES OR TYPOGRAPHICAL ERRORS. CHANGES ARE PERIODICALLY ADDED TO THE INFORMATION HEREIN; THESE CHANGES WILL BE INCORPORATED IN NEW EDITIONS OF THIS DOCUMENT. TIBCO SOFTWARE INC. MAY MAKE IMPROVEMENTS AND/OR CHANGES IN THE PRODUCT(S) AND/OR THE PROGRAM(S) DESCRIBED IN THIS DOCUMENT AT ANY TIME.

THE CONTENTS OF THIS DOCUMENT MAY BE MODIFIED AND/OR QUALIFIED, DIRECTLY OR INDIRECTLY, BY OTHER DOCUMENTATION WHICH ACCOMPANIES THIS SOFTWARE, INCLUDING BUT NOT LIMITED TO ANY RELEASE NOTES AND "READ ME" FILES.

This and other products of TIBCO Software Inc. may be covered by registered patents. Please refer to TIBCO's Virtual Patent Marking document (https://www.tibco.com/patents) for details.

Copyright © 2001-2021. TIBCO Software Inc. All Rights Reserved.